

Mixed Characteristics Of Activated Charcoal Ori Bamboo And Red Ginger as Air Purifier On Food Cabinets

by Endah Kusuma Rastini

Submission date: 13-May-2024 08:46PM (UTC-0700)

Submission ID: 2378868073

File name: 6_Mixed_Characteristics_of_Activated_Charcoal.pdf (1.13M)

Word count: 4564

Character count: 21765

Mixed Characteristics Of Activated Charcoal Ori Bamboo And Red Ginger as Air Purifier On Food Cabinets

S. Astuti¹, F. E. K. Rastin², E. Priskasa³, D. H. Praswant^{4*}

¹Chemical Engineering, National Institute of Technology, Malang, Indonesia

^{2,4}Department of Mechanical Engineering, National Institute of Technology, Malang, Indonesia

³Department of Civil Engineering, National Institute of Technology, Malang, Indonesia

*Corresponding Author Email: djoko@lecturer.itn.ac.id

ABSTRACT

Most of the community while preservation of food using refrigeration machines and chemicals, which less attention to hygiene. The storage space made of wood, glass or plastic where are almost airtight except the refrigerators which have poor air circulation and it cause of cross-contamination and also triggers bacteria growth, virus and fungi that cause decay and also disease source. These problems encourage the researchers to make a hygienic food storage space by consider the air circulation which is given an air purifier natural ingredients combinations that absorb pollutants, heavy metals, and anti-microbials. The air purifier ingredients which expected are original bamboo charcoal active, and red ginger. To make the air purifier can work effectively, a certain balanced composition is needed. The research method used is an experimental method where food ingredients are stored in a space where the air circulation is coated with a article layer of original bamboo charcoal activated and red ginger rhizome with different compositions. The material used are mixture of charcoal and ginger rhizome by making an air purifier derived from activated charcoal from ori bamboo active at a certain percentage of charcoal maturity. After that the product will be tested in food storage space with tofu for the food sample. In this research, the combination of ori bamboo charcoal active with red ginger extract was 4:0, 3:1, 2:2, 1:3, 0:4 where the ori bamboo charcoal active was used with a maturity percentage of 50%, 75%, 100%. From the results of the research, it was found that the samples stored without using the filter grew with microbes after the second day, the samples that were filtered with the composition of activated charcoal only grew microbes on the third day and there was a change in the shape of the filter, namely the aqueous filter. Samples with a composition of activated charcoal with varying maturity and ginger extract began to grow with microbes after the fourth day. The best filter results 100% mature activated charcoal with a composition of activated charcoal and ginger extract, which is 2:2. Microbes that can still grow in that position are Bacillus subtilis but in small quantities and no viruses or other microbes are found.

Keywords Air Purifier, Food Storage Cabinet, Red Ginger, Ori Bamboo
Paper type Research paper

INTRODUCTION (HEADING 1)

The foods variant in Indonesia can be classified into wet food, semi-wet food and dry food with different resilience. These foods can be decay cause of chemicals, microbial growth, enzyme growth that deviates from normal conditions and the growth of micro-organisms mixed in food due to unhygienic food production and storage [1]. They can make trigger decay because the air can contain any microbes and pathogens. Food storage technology currently mostly uses refrigeration machines or airtight boxes and sterile rooms [2]. The latest air purifiers currently use a high efficiency particle air filter (HEPA) with a particle size of 0.01 microns but this type is not proven to kill SARS-CoV-2 so it must be combined with an ultraviolet germicidal irradiation (UVGI) system so arise the new technologies emerge with using plasma cluster ions which are still under research. Disease control and prevention in United States admit that the HVAC system also cannot improve indoor clean air [3], [4]. The development of a food storage space that can absorb odors, and anti-microbials by using an activated charcoal-based air purifier combined with natural ingredients accompanied by smooth air circulation settings can be used as an alternative solution [5]–[7].

An air purifier is the tool of indoor air purifier so that the inhaled air so can be cleaner and pollution free. Air purifiers that exist today have more complex functions such as being able to regulate humidity, smell and absorb air containing flower pollen by using a mixture of chemical compounds. There are three types of air purifiers currently used by the society, namely fan style air purifiers, electric type air purifiers and ion generators. Fan style air purifier has a fan inside the machine with functions to suck the surrounding air and push the air to be filtered through the filter. The weakness of this type are have a long time to change dirty air into clean and is it noisy because of the fan noise. Electric type air purifier be able to remove air dirt with use power static electricity, plasmacluster technology and is it quiet. Ion

generator is produce the negative ions that can sterilize and neutralize smell of air. The negative ions can increase the body's immunity, reduce fatigue, and increase concentration power. These air purifiers are quite expensive, so it cannot purchased by the middle to lower class society, even though these people actually live in the residential areas close to waste disposal sites or other areas that have quite dirty air quality. The basic ingredients of an air purifier from chemicals and natural ingredients. Natural-based air purifiers usually use activated charcoal made from wood, coconut shells and bamboo. The results of the research show that the type of raw material, the activation process and the shape of the raw material affected the yield, the carbon content bound to the adsorption capacity of Iod [8], [9]. Bamboo charcoal is better than wood or coconut shells because bamboo charcoal can be naturally rejuvenated under the sun for 1 hour after a month of use and has a very high surface area, very irregular pore structure with a pore size of 5 - 500 Angstrom non-polar which allows the adsorption of various chemicals [10], [11]. Each part of the bamboo stem of the same species has different specific gravity and yield. Charcoal from the bottom of the stem on all types of bamboo showed high specific gravity and more high is lower [12]. Air purifier from bamboo-based activated charcoal combined with ginger rhizome extract has the potential as an anti-microbe and antioxidant so it is hope that the food is not oxidize naturally because the components in ginger extract contain gingerol, shogaol, zingerone which have antioxidant, anti-carcinogenic, non-mutagenic effects even at high concentrations. The main component of fresh ginger is a homologous phenolic ketone compound known as gingerol which is unstable when exposed to heat so that it turns into shogaol. The rate of degradation from [6]-gingerol to [6]-shogaol depends on the pH which is stable at pH 4 while at 100°C it is stable at pH 13]. The shogaol compound has the advantage of being an anti-virus [14]. Ginger rhizome extract, especially red has sesquiterpene secondary metabolite compounds that can inhibit the growth of avian influenza and influenza virus [15], [16].

During the post covid-19 pandemic, the air purifiers are currently quite expensive, for the middle and lower class society who are underprivileged to use a cooling machine or use a high-efficiency particle air filter (HEPA). Therefore, it is necessary to find solution using a air filter made from easily available so that the price is easy to reach. One way that can be done is to make an activated charcoal air filter made from ori bamboo combined with powder. The composition of these two materials will affect the quality of the filter, both in shape or function. So there is a need for further experiments in determining the right composition in the manufacture of air filters.

METHOD

original bamboo and red ginger filter materials were obtained from the Precet DAU Malang. The process manufacture of this air filter consists of 3 stages, namely:

1. Making ori bamboo charcoal activated

In the manufacture of activated charcoal, the original bamboo as the material for making charcoal is cut into pieces with a length of 20 cm, then dried in the sun for 10 days. The dried bamboo is put into a furnace which is equipped with a thermocontrol and blower. Composing this bamboo with a 100% maturity level using a temperature of 442 C for 2 hours. After reaching 2 hours the charcoal is cooled in the furnace for 24 hours. The cooling in the furnace is doing so the charcoals is still in high temperature conditions is not contaminated with air which causes the charcoals to turn to ash.

The cooled original bamboo charcoal is then powdered with 100 mesh flour machine. After that, the charcoal activation process is carried out using chemical methods. In the chemical activation process, 1 kg charcoal is soaked 1800 ml of CaCl₂ solution for 24 hours at room temperature. Then the charcoal bath is drained and then put into the furnace.

Charcoal immersion which is inserted into the furnace is reheated at a temperature of 500°C for 2 hours and holding for 30 minutes. After reaching the temperature, the furnace is turned off and the activated charcoal is cooled in the furnace for 24 hours. And then the activated charcoal that has cooled is grinded until it becomes a powder with a size of 100 mesh. Then the activated charcoal powder is put into an airtight container.

2. Proses of making ginger powder

Before making ginger powder, ginger as a raw material is cleaned of dirt. After that, the ginger is peeled and cleaned again. The next process is thinly sliced ginger and put into a grinder machine. Ginger that has been grinded, squeezed and separated between the liquid and ginger pulp. Then, the separated dregs were put into a dehydrator at 70°C for 5 hours. The dried and cold ginger dregs are grinded until it becomes ginger powder. Then the ginger powder is stored in a sterilized place.

3. Filter Making Process

First step on the process of making filters are each material is weighed first. Then the activated bamboo charcoal, ginger powder and calcium food grade adhesive are mixed until evenly distributed. After that enter the distilled water, then stir until evenly distributed. The second step, the hydraulic press which is equipped with a heater is turned on. Set the hydraulic press machine heater temperature to 50 °C. the mixture of activated charcoal ori bamboo with other ingredients placed into the mold, then pressed to a pressure of 100 bar for 10 minutes. After that the filter was cooled using free air at room temperature for 30 minutes. The cooled filter was put into a dehydrator at 40° C for 5 hours. Then the filter is packed using aluminum foil and sealed with vacuum plastic.

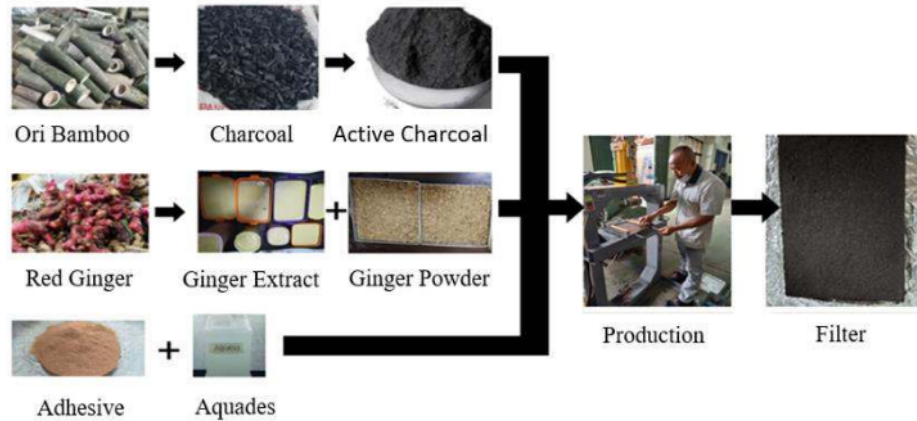


Fig. 1. Filter making process

The composition of the ratio of activated charcoal ori bamboo and ginger powder used in this research was 4:0, 3:1, 2:2, 1:3, 0:4. For the other mixed materials, it is assumed that the adhesive is calcium food grade 40 grams and aquades 100 grams. The filter mold used is 20 x 20 cm. The analysis carried out on the air filter to determine the effect of the composition of the alloy material and the condition of the activated charcoal material took SEM-EDX analysis, organoleptic analysis and microba analysis. The tools which used in this reseach are shown below.



Fig. 2. (A) Furnace for Charcoal, (B) Furnace Activated Charcoal

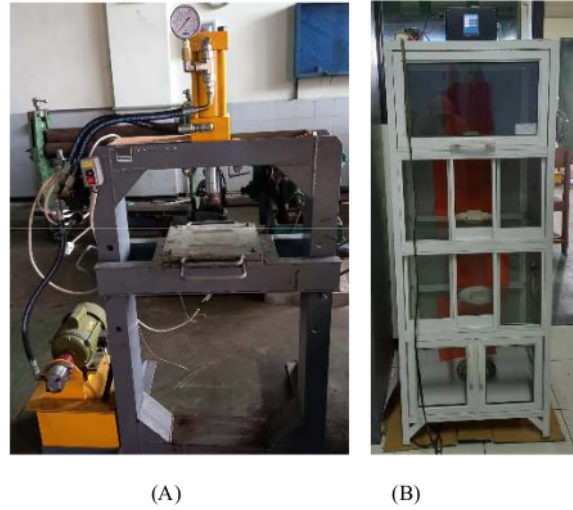


Fig. 3. (A) Press machine 5T, (B) Food storage cabinets with data logger



Fig. 4. SEM - EDX

DISCUSSION

Table 1. Filter Characteristics of Activated Charcoal and Red Ginger Extract before the trial

No	Filter Composition	Compound Mass (%)									
		C	O	Ca	Na	Cl	K	S	Al	F	Si
1	200 g Active Charcoal	32,66	59,67	5,67	-	19,59	-	0,54	16,72	0,57	
2	50% 1 Active Charcoal	55,08	35,31	3,68	0,90	3,70	0,52	0,81			
3	50% 100 g Active Charcoal	8,74	9,35	3,64	52	3,21	03	58	-	-	-
4	50% 50 g Active Charcoal	6,52	4,79	56	76	1,59	53	27	-	-	-
5	200 g Active Charcoal	65,50	25,09	2,58	1,83	2,31	0,52	1,61	-	-	0,57
6	50 g Active Charcoal	1,41	21,54	13,82	1,53	8,85	-	2,32	-	-	2,56
7	75% 100 g Active Charcoal	6,82	8,45	5,43	17	4,11	34	90	-	5	-
8	75% 50 g Active Charcoal	47,42	2,70	2,65	35	2,45	61	1,14	-	-	0,68
9	100% 150 g Active Charcoal	47,42	40,79	7,49	1,86	8,40	1,10	2,01	-	0,59	-

Mixed Characteristics Of Activated Charcoal Ori Bamboo And Red Ginger As Air Purifier On Food Cabinets





10	100% 100 g Active Charcoal	56,04	33,99	3,48	1,22	3,16	0,94	1,16	-	-	-
11	100% 50 g Active Charcoal	46,98	44,09	2,53	1,46	1,70	1,60	1,63	-	-	-
12	200 g Gingers	42,81	51,15	0,46	1,74	-	2,34	1,49	-	-	-

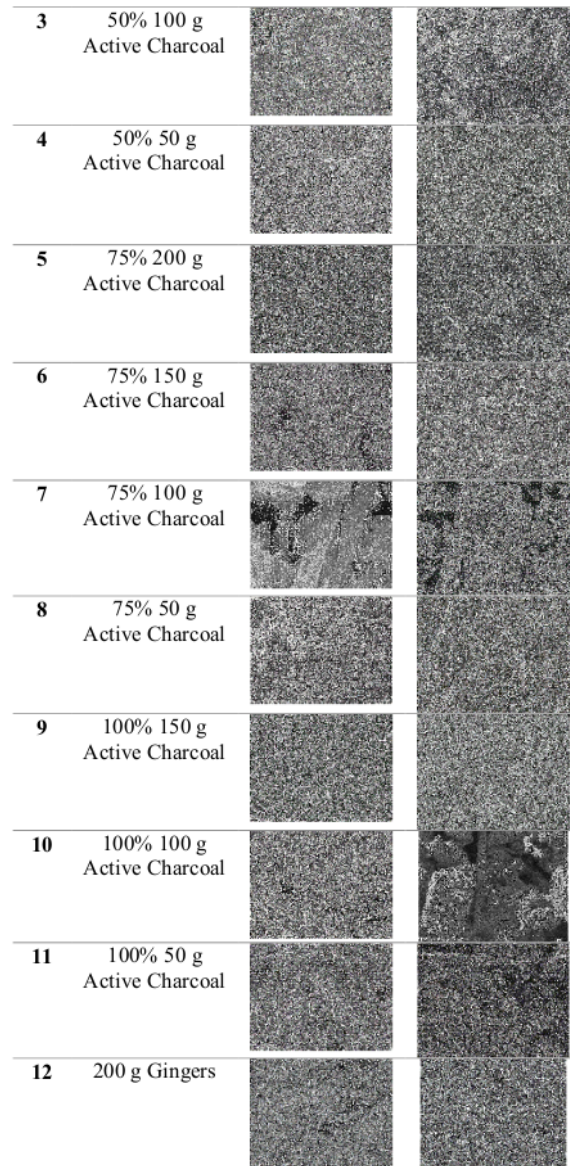
The results of the analysis characteristics filter blend of activated charcoal and red ginger extract in table 1 can be concluded that different filter compositions have different mineral content, especially in charcoal with 100% maturity. The SEM EDX results from the filter using charcoal with 100% maturity have more open pores than those using charcoal with 50% and 75% maturity as shown in table 3. It is expected that the filter using a mixture of 100% cooked charcoal and ginger extract can produce a filter with high absorption

Table 2. Filter Characteristics of Activated Charcoal and Red Ginger Extract after the trial.

No	Filter Composition	Compound Mass (%)									
		C	O	Ca	Na	Cl	K	S	P	Si	Fe
1	50% 200 g Active Charcoal	59,41	34,85	9,10	1,24	7,18	-	1,57	-	0,69	0,13
2	50% 150 g Active Charcoal	42,41	21,65	3,67	0,47	3,50	0,50	0,70	-	-	0,13
3	50% 100 g Active Charcoal	39,78	27,60	3,12	0,88	2,93	0,86	0,70	-	-	-
4	50% 50 g Active Charcoal	48,74	42,81	2,03	2,10	1,70	1,34	1,28	-	-	-
5	75% 200 g Active Charcoal	64,76	25,91	2,96	1,76	2,50	0,70	1,68	-	-	0,66
6	75% 150 g Active Charcoal	41,44	31,12	5,37	0,93	4,77	0,69	1,15	-	1,63	2,74
7	75% 100 g Active Charcoal	41,76	45,35	7,38	1,45	4,95	0,97	3,29	-	0,37	-
8	75% 50 g Active Charcoal	24,73	21,72	2,15	0,54	2,33	1,53	0,87	-	-	-
9	100% 150 g Active Charcoal	40,80	50,58	10,82	0,96	4,50	0,68	4,28	-	1,28	2,52
10	100% 100 g Active Charcoal	28,25	21,82	3,75	0,45	2,39	0,73	0,88	-	-	-
11	100% 50 g Active Charcoal	49,67	40,85	2,27	1,91	1,97	1,62	1,71	-	-	-
12	200 g Gingers	30,94	35,63	0,43	1,95	-	2,46	1,57	0,58	-	0,42

Table 3. The photos results of SEM before and after the trial

No	Filter Composition	The image SEM before trial	The image SEM after trial
1	50% 200 g Active Charcoal		
2	50% 150 g Active Charcoal		





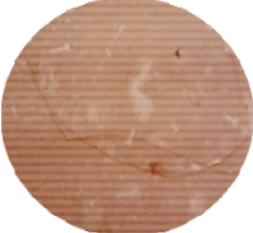
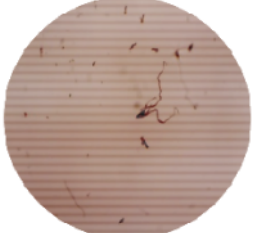
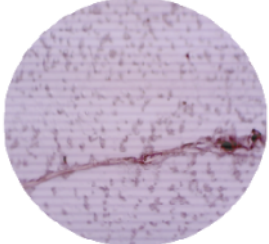
results of SEM-EDX test, there are metal compounds that appear after the filter was used. One of the heavy metal compounds is ferrous metal (Fe). This is due to the metal ion adsorption process carried out by activated carbon which is a non-polar adsorbent due to the Van Der Waals force. The unbalanced forces at the filter phase boundary because of strange molecules to be attracted to the filter surface, so that making a single layer on the adsorbent surface. Metal ions diffuse to the pores of the activated carbon due to differences concentration of the adsorbate and the pores of carbon [17]–[19].



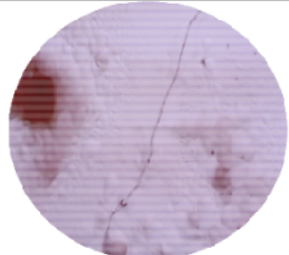


The trial results of the filter blend of activated charcoal and red ginger extract in table 2 can be concluded that in addition to increasing filter weight, the filter is also getting more humid. The test food material has physical changes due to the growth of microbes. After microbiological analysis, it turned out that the average growth was *Bacillus Substillis*, was only one sample that contained *Staphylococcus* and *Rhizopus* while other microbes including viruses were not detected. The cabinet does not bad smell, the test sample doesn't bad smell either. It means that the filter can be used as an odor remover and anti-microba, especially virus. In the food storage cabinets, *Bacillus substilis* can grow because there is charcoal (carbon) in the filter which can accelerate its growth and these bacteria are always in the air [3]. Red

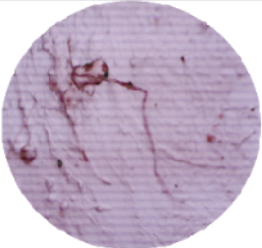
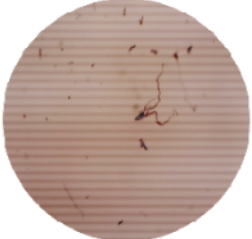

Mixed Characteristics Of Activated Charcoal Ori Bamboo And Red Ginger As Air Purifier On Food Cabinets

ginger has shogaol compound that functions as an antiviral but cannot kill *Bacillus subtilis* bacteria, because of that even though it has been mixed with *Bacillus anti-virus*, it is still present [4]. According to research results *Bacillus Subtilis* is not a harmful microbe. In another observation if the filter made is not added with ginger extract (pure activated charcoal) the air in the cupboard also does not bad smell but the filter becomes moist and eventually at a certain time will be destroyed and liquid comes out of the filter so that the air filter in the food cupboard can not only made of activated charcoal only.

Table 4. The results of microba growth analysis on material test day 5

No.	Filter Composition	The Microba species	Day in	The Microba amount	Pictures
1.	No filter	<i>Bacillus Cereus</i>	2	47	
2	50% 200 g Active Charcoal	<i>Bacillus Subtillis</i>	3	16	
3	50% 150 g Active Charcoal	<i>Bacillus Subtillis</i>	4	6	
4	50% 100 g Active Charcoal	<i>Bacillus Subtillis</i>	4	9	
5	50% 50 g Active Charcoal	<i>Bacillus Subtillis</i>	4	10	

6	75% 200 g Active Charcoal	Bacillus Subtillis	3	11	
7	75% 150 g Active Charcoal	Bacillus Subtillis	5	16	
8	75% 100 g Active Charcoal	Bacillus Subtillis	5	20	
9	75% 50 g Active Charcoal	Bacillus Subtillis	4	8	
10	100% 200 g Active Charcoal		3	11	
11	100% 150 g Active Charcoal	-	3	0	

12	100% 100 g Active Charcoal	Bacillus Subtillis	5	9	
13	100% 50 g Active Charcoal	Bacillus Subtillis	5	15	
14	200 g Gingers	Bacillus Subtillis	3	4	

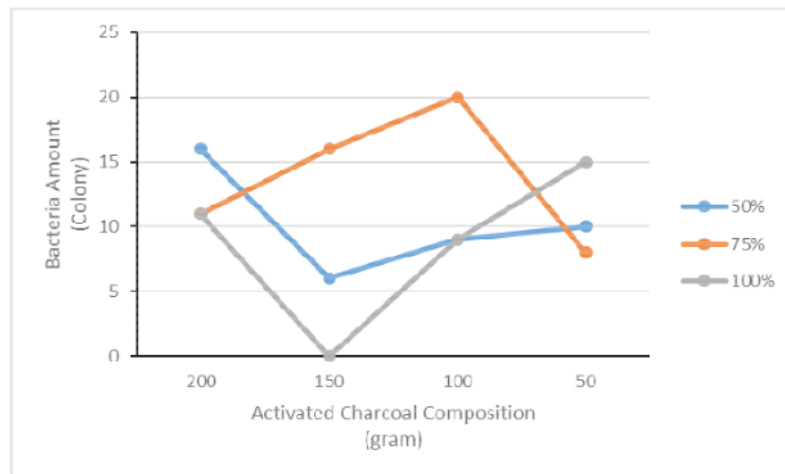


Fig. 5. The graph of the activated charcoal composition on the bacteria amount at the level of charcoal maturity

In the cabinet which use air filtered, microbes began to grow in the test material on day 3 (three) with different numbers of colonies, while the test material placed in the unfiltered cabinet began to grow on day 2 (two). From these observations it can be concluded that the filtered food cupboard is in better condition than without the filter. Although there are bacteria that grow on food, *Bacillus Subtillis* bacteria are still classified as harmless bacteria. From the results of these research, it can be concluded that the addition of an air filter with a 100% maturity percentage can slow down the growth rate, this can be proven by observations on the 3rd day of bacteria still not appearing. *Bacillus Subtillis* bacteria will appear on day 5 with a small number of colonies compared to other air filter compositions. This is because *Bacillus subtillis* bacteria can survive at a temperature of -5°C - 75°C with a pH of 2-8 and grow 2 times at a temperature of 40°C

20]. According to the moisture logger data in food storage cabinets, during the trial the average humidity in the storage cabinet was 65% - 75% at room temperature 27°C - 28°C. The average humidity is still relatively high when compared to humidity outside the food storage cabinet, which is 85%. That is causes the bacteria *Bacillus subtilis* grow in the sample. The results of previous research, it was stated that bacteria will thrive in conditions of high humidity [21]. In the trial in this study, the food sample used was tofu. Tofu is a carbon source, so the growth of bacteria will increase in tofu. This is because the carbon source is the most important factor in bacterial growth [22].

CONCLUSION

From the final results of the research it can be concluded that different filter compositions have different mineral content. Iso, especially in charcoal with 100% maturity. SEM EDX results from filters which used charcoal with 100% maturity have more open pores than those using charcoal with 50% and 75% maturity. With apply 100% charcoal maturity level and 100 grams composition of activate charcoal bamboo, be able to delay the growth rate of bacteria and viruses. It be evidenced with this composition, the bacteria on tofu which become sample test grow after 5th day after the compared test with other compositions, where bacteria could grow on the 4th day.

ACKNOWLEDGMENT

Thanks a lot to KEMENDIBUDRISTEK and The Research and Community Service Institution (LPPM) National Institute of Technology (ITN) Malang, Indonesia which was funded the research so our team could finished and publish the research results also.

REFERENCES

- 1] M. Wróbel, J. Jędrzejewska and E. Polak, "The operation analysis of the innovative mainbox food storage device," *Appl. Sci.*, vol. 11, no. 16, 2021, doi: 10.3390/app11167682.
- 2] B. Ekumah *et al.*, "Disparate on-site access to water, sanitation, and food storage heighten the risk of COVID-19 spread in Sub-Saharan Africa," *Environ. Res.*, vol. 189, p. 109936, 2020, doi: 10.1016/j.envres.2020.109936.
- 3] Ontario. Ministry of Health and Long-Term Care Medical Advisory Secretariat., "Air cleaning technologies : health technology literature review.," *Ont Heal. Technol Assess Ser.* 2005; 5(17) 1–52. , vol. 5, no. 17, pp. 1–52, 2005.
- 4] W. C. Y. M. L. P. R. V. P. A. R. S. M. P. David A. Christopherson, "High-Efficiency Particulate Air Filters in the Era of COVID-19: Function and Efficacy | Enhanced Reader," *American Academy Otolaryngology–Head and Neck Surgery*, 2020. .
- 5] F. Uddin, N. Gunde-cimerman, and F. Uddin, "Environmental Concerns in Antimicrobial Finishing of Textiles Related papers Environmental Concerns in Antimicrobial Finishing of Textiles," doi: 5923/s.textile.201401.03.
- 6] K. J. Edgar and H. Zhang, "Antibacterial modification of Lyocell fiber: A review," *Carbohydr. Polym.*, vol. 250, . 116932, 2020, doi: 10.1016/j.carbpol.2020.116932.
- 7] J. Nsor-Atindana, F. Zhong, K. J. Mothibe, M. L. Bangoura, and C. Lagnika, "Quantification of total polyphenolic content and antimicrobial activity of cocoa (*Theobroma cacao* L.) Bean shells," *Pakistan J. Nutr.*, vol. 11, no. 7, pp. 574–579, 2012, doi: 10.3923/pj.2012.672.677.
- 8] T. Horikawa, Y. Kitakaze, T. Sekida, J. Hayashi, and M. Katoh, "Characteristics and humidity control capacity of activated carbon from bamboo," *Bioresour. Technol.*, vol. 101, no. 11, pp. 3964–3969, 2010, doi: 10.1016/j.biortech.2010.01.032.
- 9] D. Krans, "(12) Patent Application Publication (10) Pub. No.: US 2014/0186224 A1," vol. 1, no. 19, 2014.
- 0] L. M. Ferreira, R. R. de Melo, A. S. Pimenta, T. K. B. de Azevedo, and C. B. de Souza, "Adsorption performance of activated charcoal from castor seed cake prepared by chemical activation with phosphoric acid," *Biomass Convers. Biorefinery*, 2020, doi: 10.1007/s13399-020-00660-x.
- 1] J. Jimmy, A. Roesyadi, S. Suprpto, F. Kurniawansyah, W. Anggraini, and R. Rahmawati, "Activated carbon from bamboo waste: Effect of activation sequences and iron-cobalt impregnation to material properties and catalyst performance," *J. Appl. Eng. Sci.*, vol. 18, no. 1, pp. 1–9, 2020, doi: 10.5937/jaes18-23014.
- 2] A. Staszowska, "Assessment of the air purifier effectiveness under model conditions," *J. Phys. Conf. Ser.*, vol. 1736, no. 1, 2021, doi: 10.1088/1742-6596/1736/1/012043.
- 3] B. Joseph Oso, A. Oluwaseun Adeoye, and I. Francis Olaoeye, "Pharmacoinformatics and hypothetical studies on allicin, curcumin, and gingerol as potential candidates against COVID-19-associated proteases," *J. Biomol. Struct. Dyn.*, pp. 2–13, 2020, doi: 10.1080/07391102.2020.1813630.
- 4] M. Musarra-pizzo, R. Pennisi, I. Ben-amor, G. Mandalari, and M. T. Sciortino, "Human Viruses," pp. 1–30, 2021.
- 5] M. Firoozi, S. Rezapour-Jahani, Z. Shahvegharasl, and N. Anarjan, "Ginger essential oil nanoemulsions: Preparation and physicochemical characterization and antibacterial activities evaluation," *J. Food Process Eng.*, vol. 43, no. 8, 2020, doi: 10.1111/jfpe.13434.
- [16] X. Wang *et al.*, "Antibacterial Activity and Mechanism of Ginger Essential Oil against *Escherichia coli* and *Staphylococcus aureus*," *Molecules*, vol. 25, no. 17, 2020, doi: 10.3390/molecules25173955.

- 17] M. Karnib, A. Kabbani, H. Holail, and Z. Olama, "Heavy metals removal using activated carbon, silica and silica activated carbon composite," *Energy Procedia*, vol. 50, pp. 113–120, 2014, doi: 10.1016/j.egypro.2014.06.014.
- 18] U. Kouakou, A. S. Ello, J. A. Yapó, and A. Trokourey, "Adsorption of iron and zinc on commercial activated carbon," *J. Environ. Chem. Ecotoxicol.*, vol. 5, no. 6, pp. 168–171, 2013, doi: 10.5897/JECE2013.0264.
- 19] V. C. Srivastava, I. D. Mall, and I. M. Mishra, "Adsorption of toxic metal ions onto activated carbon. Study of sorption behaviour through characterization and kinetics," *Chem. Eng. Process. Process Intensif.*, vol. 47, no. 8, pp. 1269–1280, 2008, doi: 10.1016/j.ccep.2007.04.006.
- 0] R. Isticato, M. Lanzilli, C. Petrillo, G. Donadio, L. Baccigalupi, and E. Ricca, "Bacillus subtilis builds structurally and functionally different spores in response to the temperature of growth," *Environ. Microbiol.*, vol. 22, no. 1, pp. 170–182, 2020, doi: 10.1111/1462-2920.14835.
- 1] K. V. Sazanova *et al.*, "Carbonate and oxalate crystallization by interaction of calcite marble with bacillus subtilis and bacillus subtilis–aspergillus niger association," *Crystals*, vol. 10, no. 9, pp. 1–16, 2020, doi: 10.3390/cryst10090756.
- [22] M. Duan *et al.*, "Effects of Bacillus subtilis on carbon components and microbial functional metabolism during cow manure–straw composting," *Bioresour. Technol.*, vol. 303, no. January, p. 122868, 2020, doi: 10.1016/j.biortech.2020.122868.

Mixed Characteristics Of Activated Charcoal Ori Bamboo And Red Ginger as Air Purifier On Food Cabinets

ORIGINALITY REPORT

0%

SIMILARITY INDEX

0%

INTERNET SOURCES

0%

PUBLICATIONS

%

STUDENT PAPERS

PRIMARY SOURCES

Exclude quotes Off

Exclude matches < 2%

Exclude bibliography Off