



THE 5TH
ENVIRONMENTAL TECHNOLOGY
AND MANAGEMENT CONFERENCE
NOVEMBER 23RD - 24TH 2015
BANDUNG, INDONESIA

EDITOR IN CHIEF
Prof. Dr. Ir. Enri Damanhuri

PROCEEDINGS BOOK

ISBN 978-979-98278-5-2

FACULTY OF CIVIL AND
ENVIRONMENTAL ENGINEERING
INSTITUT TEKNOLOGI BANDUNG



Proceedings

The 5th Environmental Technology and Management Conference

Green Technology towards Sustainable Environment

23 - 24 November 2015, Bandung, Indonesia

Editor in Chief

Prof. Dr. Ir. Enri Damanhuri



Published by

Faculty of Civil and Environmental Engineering

Institut Teknologi Bandung – Indonesia

ISBN 978-979-96278-5-2



Proceedings

The 5th Environmental Technology and Management Conference *Green Technology towards Sustainable Environment*

ISBN: 978-979-98278-5-2

Editorial Board:

Prof. Dr. Ir. Enri Damanhuri, Prof. Dr. Ing. Ir. Prayatni Soewondo, MS., Prof. Dr. Ir. Arwin Sabar, MS., Prof. Ir. Suprihanto N, PhD., Prof. Dr. Ir. Mindriany Syafila, MS., Dr. Ir. Tri Padmi, Dr. Ir. Tresna Dermawan Kunaefi, Dr. Ir. Benno Rahardyan, MT., Ir. Puji Lestari, PhD., Dr. Ir. Priana Sudjono, MS., Dipl.Eng., Ir. Idris Maxdoni Kamil, MSc., PhD., Dra. Barti Setiani Muntalif, PhD., Dr. Ir. Indah Rahmatiah Siti Salami, MSc., Ir. Arief Sudrajat, MSc., PhD.

International Scientific Committee:

Prof. Damir Brdanovic, PhD., MSc. (UNESCO-IHE, Institute of Water Education), Prof. Huu Hao Ngo, PhD (University of Technology Sydney), Assoc. Prof. Yen Pen Ting, PhD. (National University of Singapore), Prof. Dr. Amadou Hama Maiga (International Institute for Water and Environmental Engineering, Burkina Faso), Prof. dr. A.J.M. Smits, (Director of Institute for Science, Innovation & Society, Radboud University Nijmegen)

Cover Design:

Sandy Indriana

Publisher:

Faculty of Civil and Environmental Engineering
Institut Teknologi Bandung
Jl. Ganesha 10 Bandung 40132
Telp. 022 2504952
Fax. 022 2516586
Email: kantor@fisl.itb.ac.id
Website: www.fisl.itb.ac.id

Copyright and Reprinting Policy:

Permission to make digital or hard copies of portions of this work for personal or classroom use is granted without fee provided that the copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ETMC must be honored. Abstracting with credit is permitted.

KEYNOTE SPEAKERS

NAME	THEME
Ir. Mochamad Basoeeki Hadimoeljono, M.Sc., Ph.D (Ministry of Public Work and Housing of Indonesia)	Green Infrastructure Research and Development in Indonesia
Prof dr A.J.M. Smits Radboud University Nijmegen	Water, Health, and Sustainability
Albert Simanjuntak, Chevron Pacific Indonesia	Eco Energy Research and Development in Oil and Gas Industry
Dr. Ir. Edwan Kardena, ITB	Microbial Application for Enviromental Pollution Control: "From Laboratorium into The Field"

INVITED SPEAKERS

NAME	TITLE
Prof. Satoshi Okabe	Advance In Biological Nitrogen Removal Process – Anamox – Based Process
Prof. Dr. Ir. Mindriany Syafila,MS	Advance Oxidation Processes (AOPs) For Wastewater Treatment Application
Prof. Ir. Iwan Krisdasantausa Hadihardaja, MSc, PhD	River Regime Change and the Basin Land Use Development Regarding To Healthy River Performance
Prof. Dr. Takeshi Fujiwara	Study On Impact Analysis Of Recycling – Based Municipal Solid Waste Management On Recycling Business Of Informal Sector In Bandung
Rene van Berkel, PhD	Competitive Advantage Through Industrial Resource Efficiency : Pathway Towards Inclusive and Sustainable Industrialization
Prof. dr. A.M.J. Ragas	Modelling Human and Ecological Risks Of Chemicals
Dr. Budi Haryanto, SKM, MKM, MSc	Blood Lead Levels For Human Health Risk Assessment: A Case Of Used Battery Recycling In Indonesia
Dr. rer.nat Armi Susandi, MT	Impact Of International Climate Policy On Air Pollution In Indonesia

LIST OF COMMITTEE

STERRING COMMITTEE

Chairman : Prof. Dr. Ir. Mindriany Syafila, MS

1. Prof. Dr. Ir. Wisjnuprpto
2. Prof. Dr. Ir. Enri Damanhuri
3. Prof Ir Suprihanto N, Ph.D
4. Prof. Dr. Ing. Ir. Prayatni Soewondo, MS
5. Prof. Dr. Ir. Arwin Sabar, MS
6. Prof. Dr. Ir Tjandra Setiadi, M.Sc
7. Dr. Ir. Dwina Roosmini, MS
8. Dr. Ir. Edwan Kardena
9. Ir. R. Driejana, MSCE, Ph.D
10. Dr. Herto Dwi Ariesyadi, ST, MT
11. Dr. Rofiq Iqbal, ST, MSc

ORGANIZING COMMITTEE

Chairman : Ir. Agus Jatnika Effendi, PhD

Secretary : Emenda Sembiring, ST, MT, MEngSc, PhD

Treasurer : Dr. Ing Marisa Handajani, ST, MT

Sponsorship coordinator : Ir. Puji Lestari, PhD

Ir. Edwan Kardena, PhD

Dr. Sukandar, SSi, MT

Dr. Asep Sofyan, ST, MT

Publication : Dr Mont Kania Dewi ST, MT

Ir. Indah Rahmatiah, MSc, PhD (proceeding)

Haryo Satriyo Tomo, ST, MT (internet media)

Ir. James Nobelia I, MT

Logistic coordinator : Dr. Ahmad Soleh, ST, MT

Dr. Helmy, ST,MT

Drs Daddy Surachman, MS

Ir. Hardjono

Drs. Moh. Irsyad, M.Si

Program Coordinator : Suharyanto, ST,MSc, PhD

Ir Yuniati, MSc, PhD

Dr. Opy K, ST., MT

Dr. Ir. Tri Padmi D

Welcome Dinner coordinator : Dr. Katharina Oginawati

Exhibition/Poster coordinator : Dr. I.M.Wahyu W, ST,MT

Dr. Mochammad Chaerul, ST, MT

SCIENTIFIC COMMITTEE

Chairman : Prof. Dr. Ir. Enri Damanhuri

Secretary : Prof. Dr. Ing. Ir. Prayatni Soewondo, MS

1. Prof. Dr. Ir. Arwin Sabar, MS
2. Prof. Ir. Suprihanto N, Ph.D
3. Prof. Dr. Ir. Mindriany Syafila, MS
4. Dr. Ir. Tri Padmi Damanhuri
5. Dr. Ir. Tresna Dermawan Kunaefi
6. Dr. Ir. Benno R, MT
7. Ir. Pudji Lestari, Ph.D
8. Dr. Ir. Priana Sudjono, MS, Dipl.Eng
9. Ir. Idris Maxdoni Kamil, M.Sc, Ph.D
10. Dra. Barti Setiani Muntalif, Ph.D
11. Dr. Ir. Indah Rahmatiah SS, MSc
12. Ir Arief Sudrajat, MSc,PhD

CONTENTS

ORAL PRESENTATION

APPROPRIATE AND ADVANCED ENVIRONMENTAL TECHNOLOGY

SITI AINUN M. RANGGA SURURI KASIH SAKINAH	Leachate Treatment Using Conventional Ozonation Process And Advanced Oxidation Process At Old Cell Of Landfill In Indonesia	OP/AE/003
ADILLA MUTIA FATIMAH BARTI SETIANI MUNTALIF	Cultivation Of <i>Chlorella Vulgaris</i> As Biofuel Potential In Wastewater For The Removal Of Cod, TKN, And Total Phosphate	OP/AE/004
PUTRI NUR ANNISA RUFDAIDAH WELLY HERUMURTI	The Effect Of Organic Loading Rate On Anaerobic Baffled Reactor-Anaerobic Filter In Increasing Efficiency Of Domestic Wastewater	OP/AE/005
ALJUMRIANA WELLY HERUMURTI	Effect Of Aerobic-Anoxic Duration In SBR And MBBR For Leachate Treatment	OP/AE/006
DIMAS BRILLIANT SUNARNO ALI MASDUQI ATIEK MOESRIATI	Influence Of Inlet Flow Velocity And Amount Of Inlet On Hydrocyclone To Reduce Total Suspended Solid	OP/AE/008
ANDY MIZWAR GINA LOVA SARI SRI RACHMANIA JULIASTUTI YULINAH TRIHADININGRUM	Bioremediation of Polycyclic Aromatic Hydrocarbons in Coal Contaminated Soils Using In-Vessel Composting Method	OP/AE/010
ROSETYATI RETNO UTAMI GERTJAN GEERLING A.M.J. RAGAS LUFIANDI DWINA ROOSMINI	Evaluation Of Passive Sampling Method For Organic Contaminant Monitoring In Upper Citarum River West Java Indonesia	PP/AE/012

PUJI MENTARI SURIPTO	The Quality Of Unconfined Aquifer In Tamansari Sub-District Bandung	
DESSAEDA ADILLA IDRIS MAXDONI KAMIL	Economic Valuation Of Perum Perhutani's Community Based Forest Management (Cbfm) And Its Application As Riparian Buffer Zone Of Cipanji- Cisondari River In Bandung Regional	OP/NR/013
EVY HENDRIARANTI NIEKE KARNANINGROEM	Rate Of Nitrification-Denitrification Brantas River In The City Of Malang	OP/NR/014
EKA WARDHANI SUPRIHANTO NOTODARMOJO	Assessment Of Heavy Metal Contamination In Surface Water And Sediments: A Case Study From Saguling Lake, West Java	OP/NR/015
ANDRI WARSA KADARWAN SOEWARDI	Estimation Of Phosphorus Loading And Its Impact On Eutrophication At Jatigede Reservoir, Sumedang-West Java, Indonesia	OP/NR/020
HERTO DWI ARIESYADY AMALIA RIZKA RAHMANI	The Diversity Of Nitrogen Cycling Bacteria As A Bioindicator Of Domestic And Industrial Wastewater Pollution In The Sediment Of Upper Citarum River, West Java, Indonesia	OP/NR/030
LUFIANDI GERTJAN GEERLING AGUS JATNIKA EFFENDI DWINA ROOSMINI	Water Quality Management And Water Pollution Control Under Decentralization In Indonesia: The Case Of Upper Citarum River Basin	OP/NR/032
RATIH PRATIWI INDAH RACHMATIAH SS	Combination Of Eichhornia Crassipes, Pistia Stratiotes, And Salvinia Molesta To Improve Water Quality Of Upstream Citarum River	OP/NR/038
KANIA DEWI YUYUN ISMAWATI	Inventory of Mercury Releases In Indonesia	OP/NR/041
YUNIATI ZEVI DEIFY NOVANDY MINDRIANY SYAFILA	Removal Of Iron And Manganese Ions From Groundwater By Sukabumi Greenstone: The Role Of Natural And Activated Modernite	OP/NR/043



The 5th Environmental Technology and Management Conference "Green Technology towards Sustainable Environment" November 23 - 24, 2015, Bandung, Indonesia.

ISBN : 978-979-98278-5-2

RATE OF NITRIFICATION-DENITRIFICATION BRANTAS RIVER IN THE CITY OF MALANG

Evyy Hendriarianti^{a,*†}, Email: hendriarianti@yahoo.com

Nieke Karnaningroem^b, Email: nieke@enviro.its.ac.id

^a Department of Civil and Environmental Engineering, Institut Teknologi Nasional Malang and Institut Teknologi Sepuluh Nopember Surabaya, Indonesia

^b Department of Civil and Environmental Engineering, Institut Teknologi Sepuluh Nopember Surabaya, Indonesia

* Presenter; † Corresponding author.

Abstract: One of river deoxygenation process is the nitrification-denitrification due to the existence of dissolved Ammonia (NH_3) and Nitrate (NO_3). Nitrification-denitrification in the receiving river of domestic wastewater with organic content and nutrients high, lead to decrease in dissolved oxygen. In the water quality model, rate of nitrification and denitrification are useful in the calibration process. River nitrification-denitrification rates that are currently are inputted to the river water quality models, are still from the old data that is no longer relevant to the current river conditions, especially in Indonesia. These often lead to the length of time for the calibration process in water quality model. In an effort to make model of the optimization DO river and water quality, a study was conducted to determine the rate of denitrification of Brantas river in Malang city using Thomas method and long term analytic method of NH_3 and NO_2 . Results of analysis of NH_3 and NO_2 for 30 days showed a tendency to decrease until day 5 where there were no NH_3 and NO_2 anymore after that. Value of rates of Nitrification and Denitrification fluctuated from upstream to downstream in the value range 0.156 to 8.699 for nitrification rate and 0.260 to 1.732 for denitrification rate. The high of the nitrification and denitrification rates showed the high nutrient Nitrogen in the Brantas river in the city of Malang. The high of nutrient-N on the upstream of this complicates the improvement in river water quality downstream. Whereby the nutrient pollutant load in the downstream is greater. The results of calculations by the Thomas method showed difference value of determination R^2 for nitrification (0.3496 to 0.9251) and denitrification rate (0.8987 to 0.9851). With this value, Thomas method was not appropriate to determine the rate of nitrification Brantas river in the city of Malang. But this method was appropriate for determination of denitrification rate.

Keywords: nitrification-denitrification rate, Brantas river, NO_2 , NH_3 , Thomas Method.

1. Introduction

The existence of ammonia and nitrite compounds in water cause denitrification and denitrification processes. This process requires oxygen, causing a reduction DO. DO parameters into one river water quality parameters that are important in preserving the river as a water resource. Dissolved oxygen needed by most living things aquatic. In addition, the oxygen needed for other purposes besides fish such as algae respiration and biochemical oxidation processes (Palmer, 2001). The rate of denitrification showed reduced rate of oxygen per day for the denitrification process. Its value depends on the concentration of ammonia in the river. The higher the value on the river that high concentrations of ammonia and nitrate. The rate of oxygen uptake per unit of ammonia of 3.42 MgO/MgN) and the rate of oxygen uptake per unit of nitrite of 1.14 MgO/MgN . In addition it also determined the rate of denitrification (kdn) 0,001 ~ 1 / day and denitrification rate of ammonia-N (kn) 0.05 ~ 0.5 / day (Chapra, 1997).

Denitrification rate value of the river becomes a determinant variable in the calibration process simulation model Nitrogen river. During deoxygenation rate value is determined from literature or previous studies (Palmer, 2001). The calibration process in this way takes in the process of trial and error because of the physical, chemical and biological river is not the same. The calibration process is expected to be faster when using denitrification rate value of the results of research on the location of the same river. Therefore, in an attempt to make the river water quality simulation models and models of dynamics DO Brantas river in the city of Malang, research is needed to determine the rate of nitrification-denitrification. As in determining the rate of carbon deoxygenation, several methods have been used as a method Moment, Least Square, Thomson, Iteration, Fujimoto (Singh, 2014). Besides, the method used O'Connor's (Roquibul Nature, 2006) and Streeter Phelps formula (AP Singh, 2007). From some of these methods, the method regresi non-linear, least square and Thomas should be the first choice of estimating parameters of BOD (Okay, 2005). So in this study Thomas method is used to determine the value of Nitrification and Denitrification rate.

2. Materials and Methods

Activity determination of the rate of nitrification and denitrification is done by measuring the carbon content of ammonia and nitrite in a long time. With statistical methods, the rate of nitrification and denitrification of the river can be determined from the rate of change in the concentrations of ammonia and nitrite. The series of activities in the research described in below.

2. Determining the location of sampling

Sampling sites on the river upstream from the location determined prior to the point of discharge of the effluent and downstream locations after the point of effluent discharge. Determination of the length of the river segment is based on consideration of the conditions that affect the water quality of rivers and tributaries such as the location of the discharge point (point source) and security access sampling.

Illustration segmentation of the river as in Figure 1.

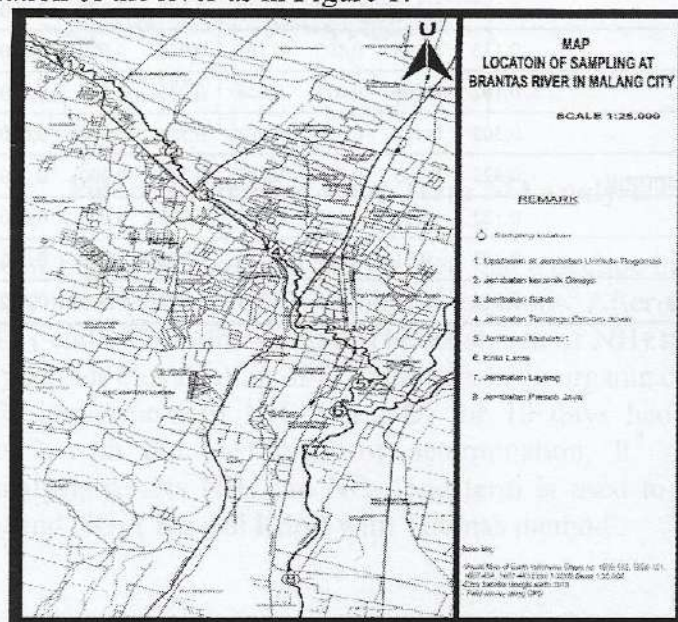


Figure 1. River Segmentation

- b. Sampling of river water conducted by SNI 6989.57 : 2008 Sampling Method of Surface Water.
- c. Analysis of NH_3 and NO_2 for 30 (thirty) days with time interval of observation everyday until five (5) days and every 5 days after day 5 for each sample using the Standard Methods (APHA 1971 & 1998).
- d. The determination of the rate of nitrification - denitrification using Thomas Method.

3. Results and Discussion

Long Term Analysis of NH_3 and NO_2

NH_3 and NO_2 analysis is done by taking a long-term time interval analysis 1 day, 2 days, 3 days, 4 days, 5 days, 10 days, 15 days, 25 days and 30 days. Sampling performed at any monitoring points which have been determined segmentation as in Figure 1 above. The analysis results can be seen in the following Table 1.

Table 1. Long Term Analysis of NH_3 and NO_2 (Concentration mg/L)

NO	LOCATION	NH_3 on day						NO_2 on day					
		1	2	3	4	5	10	15	20	25	30	1	2
1	Kasin Brantas	0.13	0.46	0.40	0.52	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2	Jembatan Suhut	0.26	0.53	0.55	0.41	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3	Telogo Mas	0.45	0.52	0.24	0.32	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4	Jembatan Muharjo	0.45	0.67	0.43	0.49	0.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	Brantas Bangau Ampung	1.14	1.04	0.49	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6	Dimoyo	0.49	0.78	0.51	0.49	0.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7	Jembatan Bumiayu	0.52	0.77	0.03	0.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8	Bumiayu Mergosono	0.35	0.57	0.69	0.50	1.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1	Kasin Brantas	0.257	0.332	0.287	0.239	0.127	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	Jembatan Suhut	0.123	0.128	0.102	0.108	0.063	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	Telogo Mas	0.102	0.096	0.071	0.058	0.035	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	Jembatan Muharjo	0.302	0.416	0.534	0.503	0.324	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	Brantas Bangau Ampung	0.423	0.533	0.983	0.887	0.744	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	Dimoyo	0.122	0.161	0.102	0.107	0.040	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	Jembatan Bumiayu	0.217	0.31	0.287	0.284	0.162	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	Bumiayu Mergosono	0.244	0.295	0.236	0.304	0.172	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Source : Analysis Result, 2015

Illustration long term NH_3 and NO_2 value in the chart as follows .

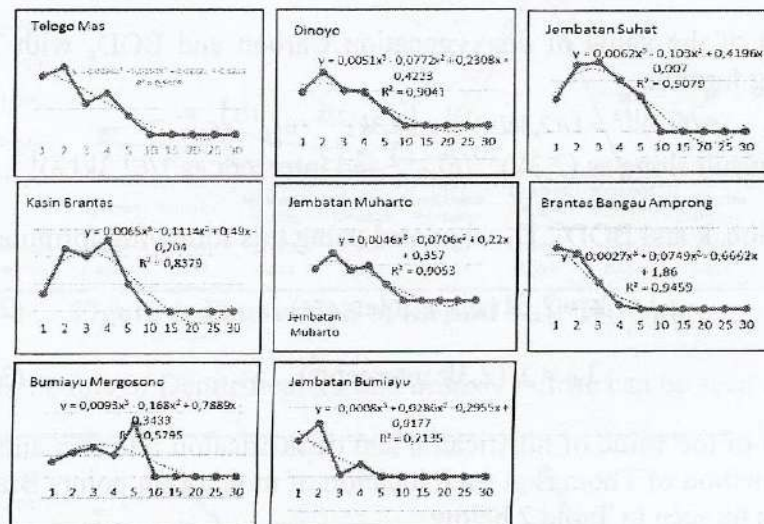


Figure 2. Trend of Long Term NH_3 Analysis

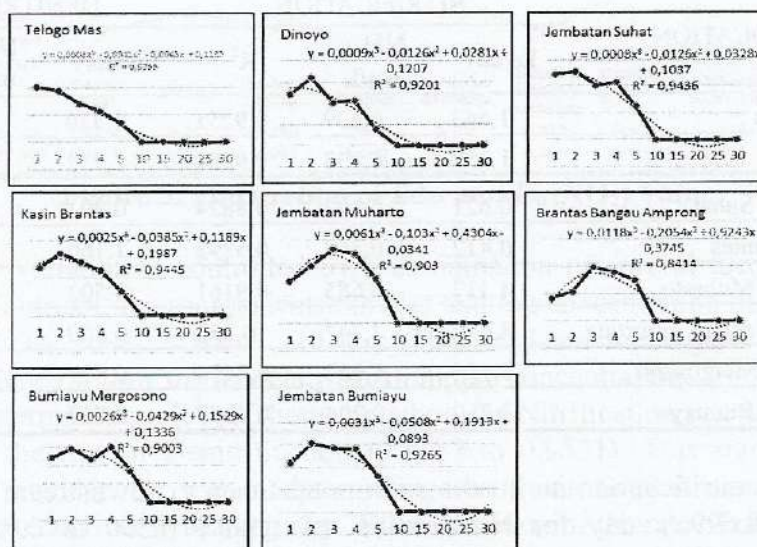


Figure 3. Trend of Long Term NO Analysis

From the Figure 2 and Figure 3 above, we can be seen that a decline in the value of NH_3 and NO_2 until day 5 time point analysis at all sampling locations. After the analysis time to 5, there is no more NH_3 and NO_2 in the sample. The existence of NH_3 and NO_2 in the sample shows still need oxygen for bioksidation of N - biodegradable organic compounds.

From the Figure 2, impairment of NH_3 and NO_2 for 10 days had a tendency to order polynomial pattern 3 with the coefficient of determination, R^2 of 0.5795 to 0.9756. Furthermore, the analysis results NH_3 and NO_2 long term is used to determine the rate of deoxygenation NH_3 and NO_2 (K_n and K_{dn}) with Thomas method .

Determination value of Nitrification and Denitrification Rate (K_d and K_{dn}) and NH_3 and NO_{2u} (L_0)

The determination of the value of deoxygenation Carbon and BOD_u with Thomas method using the following formula .

$$(t/y)^{1/3} = 1/(2,3kL_0)^{1/3} + [(2,3k)^{2/3} / 6L_0^{1/3}]t \quad (1)$$

Plot $(t/y)^{1/3}$ with t result slope as $(2,3k)^{2/3}/6L_0^{1/3}$ and intercept as $1/(2,3kL_0)^{1/3}$.

Deoxygenation value, k and BOD_u , L_0 calculated using this following formula.

$$k = 2,61(\text{slope/intercept}) \quad (2)$$

$$L_0 = 1/(2,3k.\text{intercept}^3) \quad (3)$$

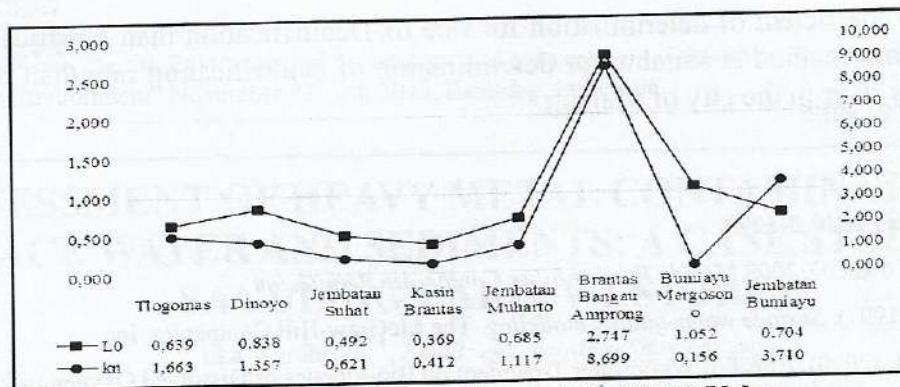
The determination of the value of nitrification and denitrification rate (K_n and K_{dn}) and NH_3 and NO_{2u} by the method of Thomas at each location of monitoring points Brantas river in the city of Malang can be seen in Table 2 below.

Table 2. Value of Rate Nitrification and Denitrification


NO.	LOCATION	NITRIFICATION			DENITRIFICATION		
		kn/day	NH_{3u} mg/L	R^2	kdn/day	NO_{2u} mg/L	R^2
1	Tlogomas	1,663	0,639	0,9251	1,530	0,134	0,9851
2	Dinoyo	1,357	0,838	0,9104	1,732	0,214	0,8987
3	Jembatan Suhat	0,621	0,492	0,8824	0,991	0,152	0,9679
4	Kasin Brantas	0,412	0,369	0,5292	1,160	0,388	0,9416
5	Jembatan Muharto	1,117	0,685	0,9161	0,503	0,504	0,9111
6	Brantas Bangau Amprong	8,699	2,747	0,853	0,260	0,938	0,8187
7	Bumiayu Mergosono	0,156	1,052	0,3496	0,727	0,324	0,9346
8	Jembatan Bumiayu	3,710	0,704	0,4077	0,759	0,329	0,9332

Nitrification and Denitrification rate fluctuates from upstream to downstream with a range of values (0.156 to 8.699) /day for Nitrification rate and (0.260 to 0.9251) /day for Denitrification rate. Nitrification rate research on Ravi river in Pakistan where receives domestic wastewater from the WWTP showed nitrification rate of 0.22 / day (Haider, 2010). Nitrification rate approached the rate of deoxygenation of carbon with a value of 0.1-0.5 / day for large rivers and in and rising to 1.0 / day for the smaller river (Thomann, 1987).

NH_{3u} values are in the range of values from 0.369 to 2.747 mg/L . While NO_{2u} values ranged from 0.134 to 0.938 mg/L. Fluctuations in the rate of Nitrification and ultimate Ammonia can be seen in Figure 4.

Figure 4. Fluctuation of kn and $L_0(\text{NH}_3)$ Value

To fluctuations in the rate of Denitrification and ultimate Nitrite can be seen in Figure 5.

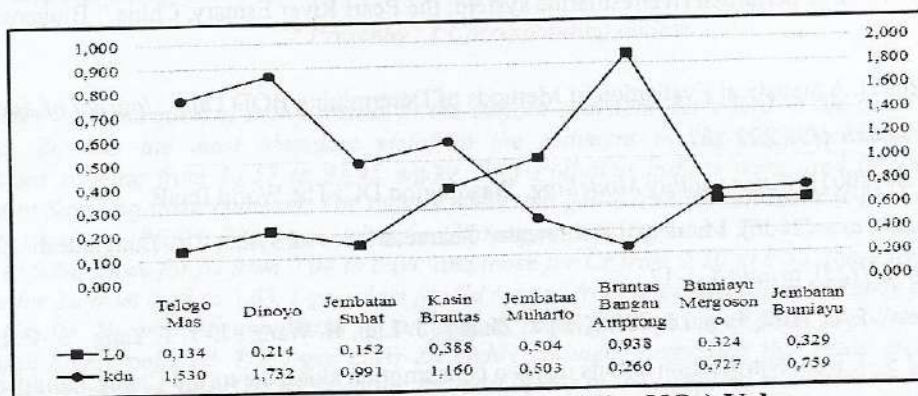Figure 5. Fluctuation of kdn and $L_0(\text{NO}_2)$ Value

Nitrification rate variation is controlled by a combination of several factors, including the concentration of nutrient, microorganisms nitrifier and the concentration of dissolved oxygen (Strauss 2002; Dai 2008; Hsiao, 2014). This explains the Figure 4 where the rate Nitrification tendency follow the tendency of Ammonia concentration.

Coefficient of determination, R^2 of Thomas method for Nitrification rate lower than (0.3496 to 0.9251) than the rate of Denitrification (0.8187 to 0.9851). This showed that Thomas method is more suitable for use in determining the denitrification rate than the rate of nitrification in Brantas river at Malang city. The calculation of the rate of nitrification can use other methods likes Least Square method and Non Linear Regression (Okay, 2005).

4. Conclusions

1. Decreasing concentration of NH_3 and NO_2 occur within five (5) days in order polynomial tendency pattern 3 with the coefficient of determination, R^2 of 0.5795 to 0.9756.
2. The rate of Nitrification and Denitrification fluctuate from upstream to downstream with a range of values (0.156 to 8.699)/day for Nitrification rate and (0.260 to 0.9251)/day for Denitrification rate.
3. Value NH_4u are in the range of values from 0.369 to 2.747 mg/L. While NO_2u values ranged from 0.134 to 0.938 mg/L.
4. The coefficient of determination, R^2 with Thomas method in determining the value kn of 0.3496 to 0.9251. As for determining the value of KDN higher R^2 values with a range of values from 0.8187 to 0.9851.

5. The high coefficient of determination for rate of Denitrification than Nitrification shows that Thomas method is suitable for determination of denitrification rate than nitrification in Brantas river in the city of Malang.


References

- [1]. (1998). *APHA.5210 B-1998*.
- [2]. (2008). *SNI 6989.57:2008 Metode Pengambilan Contoh Air Permukaan*.
- [3]. Chapra, S. (1997). *Surface water-quality modeling*. The McGraw-Hill Companies, Inc.
- [4]. Haider, H. A. (2010). Effect of Wastewater Treatment on Bio-kinetics of Dissolved Oxygen in River Ravi. *Pak. J. Engg. & Appl Sci*, 42-51.
- [5]. M. Dai, L. Wang, X. Guo, W. Zhai, Q. Li, B. He, and S.-J. Kao. Nitrification and inorganic nitrogen distribution in a large perturbed river/estuarine system: the Pearl River Estuary, China." *Biogeochemistry*, 5, 1227-1244, 2008
- [6]. Oke, I. a. (2005). A Statistical Evaluation of Methods of Determining BOD Laju. *Journal of Applied Sciences Research* 1(2), 223-227.
- [7]. Palmer, M. D. (2001). *Water Quality Modeling*. Washington DC: The World Bank.
- [8]. Roquibul Alam, e. a. (2006). Municipal Wastewater Characteristics of Sylhet City Bangladesh. *Electronic Green Journal*, 1(23), article 8, 1-12.
- [9]. S. S.-Y. Hsiao, T.-C. Hsu, J.-w. Liu, X. Xie, Y. Zhang, J. Lin, H. Wang, J.-Y. T. Yang, S.-C. Hsu, M. Dai, and I.2 S.-J. Kao, Nitrification and its oxygen consumption along the turbid Chang Jiang River plume. *Biogeochemistry*, 11, 2083-2098, 2014
- [10]. Singh A.P., e. (2007). Water Quality management of a stretch of river Yamuna: An Interactive Fuzzy Multi-objective Approach. *Water Resource Management, Springer*, 21, 515-532.
- [11]. Thomann R. V. and Mueller J. A., 1987, *Principles of Surface Water Quality Modeling and Control*. Harper International Edition, New York.



THE 5TH
ENVIRONMENTAL TECHNOLOGY
AND MANAGEMENT CONFERENCE
NOVEMBER 23rd - 24th 2015
SASANA BUDAYA GANESHA, BANDUNG, INDONESIA

FACULTY OF CIVIL
AND ENVIRONMENTAL ENGINEERING
INSTITUT TEKNOLOGI BANDUNG



CERTIFICATE OF PARTICIPATION

this is to certify that

Evy Hendriarianti

has participated as a/an
PRESENTER

In The 5th Environmental Technology and Management Conference
“Green Technology towards Sustainable Environment”
held from November 23rd - 24th, 2015 in Bandung, Indonesia

DEAN FCEE ITB

PROF. ADE SJAFRUDDIN, M. SC., PH.D.

CONFERENCE CHAIRMAN

IR. AGUS JATNIKA EFFENDI, PH.D.

