

# Sea Level Rise Flood Zones: Mitigating Floods in Surabaya Coastal Area

*by* Widiyanto Hari Subagyo Widodo

---

**Submission date:** 03-Sep-2020 10:18AM (UTC+0700)

**Submission ID:** 1378658994

**File name:** jurnal\_inter\_201\_sea\_level.pdf (513.77K)

**Word count:** 2455

**Character count:** 12324



CITIES 2013

9  
Sea Level Rise Flood Zones: Mitigating Floods in Surabaya Coastal Area

Annisaa Hamidah Imaduddina<sup>a</sup>, Widiyanto Hari Subagyo W<sup>b</sup>.\*

<sup>a</sup>Urban and Regional Planning, ITS, Surabaya, Indonesia

<sup>b</sup>Urban and Regional Planning, ITS, Surabaya, Indonesia

Abstract

Sea level rise (SLR) brings with 1 negative impact towards Surabaya's coastal area as this particular part of the city is situated only 0-3 meters above sea level. The amount of damage due to the floods indicates the city's level of readiness in facing threats from the flood. With flood height up to 90 centimeters, it is necessary to classify flood risk levels in an attempt to reduce the impact that will occur.

This paper identify sea level rise by using least square regression, which generates the trend and prediction of sea level rise. The next analysis is the identification of a potentially disaster due to sea level rise by using multinomial logistic regression. Identification of flood hazard characteristics through weighted-overlay analysis using flood height and duration as variables. It also identifies factors influencing vulnerability using Delphi analysis. AHP Expert is then employed to calculate the weight of each factor. Vulnerable zones are determined using overlay-weighted-sum on each vulnerable factor. These results are then mapped using Raster Calculator method, placing emphasis on risk functions influenced by hazard and vulnerability.

The final result is a flood risk zone map which identifies 5 risk levels according to the National Disaster Mitigation Guidance.

© 2014 Elsevier Ltd. This is an open access article under the 2 C BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/3.0/>).

Peer-review under responsibility of the Cities International Seminar Committee.

Keywords: Sea level rise, Mitigation, Risk zone.

1. Introduction

The increase of human activity, especially in the transportation, industry, building construction and human activities affect global climate change marked with an increase in Earth's average temperature from year to year.

\* 2 responding author..

E-mail address: [prananda.navitas@gmail.com](mailto:prananda.navitas@gmail.com)

Based on research by WWF, Indonesia has an increase in temperature by 0.3 ° C since 1990 and climate change scenarios conducted by WWF Indonesia and the IPCC reported that the temperature will increase by 1.3 ° C to 4.6 ° C in 2100 with the rate by 0.1 ° C to 0.4 ° C that will lead to the sea level rise by 20 - 100 cm in 100 years. The rising of sea level (sea level rise) causes some islands and places lower than sea level in potential disaster, which is the effect that in coastal areas.

Surabaya, the second largest city in Indonesia as well as the capital of East Java province, is coastal city that has a delta system in coastal morphology and topography is located on low (average 0-6 meters above sea level) with an average slope <3 % (RTRW Surabaya). P3O-LIPI investigators (1991), Meiviana et al (2004) in Proceedings of the National Seminar on Serealia (2009) and workshop proceedings (2010) showed the rate of sea level rise on coastal Surabaya as high as 5.47 mm per year, calculated in the period of 64 years (1925-1989), where the presence of sea level rise brings up the height of tide gauges. Based on data BMKG Maritim Tanjung Perak, Surabaya city was flooded due to the tide height between 150-170 cm above sea level. The following impact due to sea level rise are the changes of coastal conditions, the increased erosion, the faster the damage to the buildings and the disruption of people's activities such as housing, industry, agriculture and others. Generally the extent of the damage occurred will depend on the level and type of area edge of water used (UNDP, 2007).

## 2. Overview of Floods in Surabaya Coastal Area

Surabaya is located in south latitude and east longitude between 7°12' s.d 7°21' South latitude dan 112°36' s.d 127°54' east longitude. The study area is sub-districts located in the Coastal city of Surabaya. Based on data from the Marine BMKG Surabaya, 2011 The average maximum height of tide in coastal areas Surabaya is 150-170 cm above sea level and shows a significant rise of sea level rise in Surabaya approximately 4.8 mm / year. Here is portraits of flooding due to tides in coastal areas Surabaya.

## 3. Analysis

Preparation of the risk zone map is one of the mitigation as a result of non structural sea level rise so as to position the community at different levels of risk. here are the steps in the formulation of the risk zone.

13

### 3.1. Identification of Sea Level Rise

From the results of tidal analysis based on data per hour tidal Bakosurtanal of 20 years, with a datum Tanjung Perak Surabaya, dated January 1, 1984 to 31 December 2004 Surabaya tidal conditions are included tidal mixing daily double (mixed tide prevailing semidiurnal tide) which occurs twice a day, twice as a high tide and twice as a low tide, but has a different height and periods. This type of tidal matters occurs a lot in the eastern Indonesia obtained predictions of sea level rise trend, as follows:

Table 1. Prediction of Trend Sea Level Rise

| No | Tides | Trend of Sea Level Rise | Sea Level Rise (mm/years) | Positions of Sea Level Rise (m) |        |        |       |
|----|-------|-------------------------|---------------------------|---------------------------------|--------|--------|-------|
|    |       |                         |                           | 2010                            | 2050   | 2080   | 2100  |
| 1. | MSL   | $Y = 1.49737 + 0.0003x$ | 4 mm/th                   | 1.558                           | 1.732  | 1.84   | 1.912 |
| 2. | M2    | $Y = 0.3158 + 0.0001x$  | 1 mm/th                   | 0.3471                          | 0.3962 | 0.4311 | 0.455 |
| 3. | S2    | $Y = 0.3158 + 0.0001x$  | 4.8 mm/th                 | 0.325                           | 0.515  | 0.659  | 1.038 |
| 4. | HHWL  | $Y = 2.8308 + 0.0004x$  | 4.8 mm/th                 | 2.956                           | 3.148  | 3.292  | 3.388 |

Source : analysis result, 2012

Table 2. Prediction of Sea Level Rise until 2100

| No | Tides | Trend of Sea Level Rise | Sea Level Rise (mm/years) | Positions of Sea Level Rise (m) |       |       |       |
|----|-------|-------------------------|---------------------------|---------------------------------|-------|-------|-------|
|    |       |                         |                           | 2010                            | 2050  | 2080  | 2100  |
| 1. | MSL   | $Y = 1.49737 + 0.0003x$ | 4 mm/th                   | 0.094                           | 0.238 | 0.346 | 0.418 |
| 2. | M2    | $Y = 0.3158 + 0.0001x$  | 1 mm/th                   | 0.031                           | 0.080 | 0.115 | 0.139 |
| 3. | S2    | $Y = 0.3158 + 0.0001x$  | 4.8 mm/th                 | 0.125                           | 0.317 | 0.461 | 0.840 |
| 4. | HHWL  | $Y = 2.8308 + 0.0004x$  | 4.8 mm/th                 | 0.125                           | 0.317 | 0.461 | 0.557 |

Source : analysis result, 2012

The trend of sea level rise above, shows an increase in sea level rise of 4.8mm / year. This can result in a serious danger because the topography is quite low in ranges from 0-3m above sea level.

### 3.2. Identification of a disaster due to sea level rise

The analysis phase is aimed to look at the influence of sea level rise on society and explain whether the disasters are really occurred or not in the study area. This analysis uses the research variables consisting of two variables, namely the response variable (Y) is the flood due to sea level rise, sea water intrusion, and erosion caused by waves piling up water. and the predictor variable (X), the drainage network disruptions, the damage to the coastal environment, and an increase in mass of sea water. Here are the steps to find out the disasters caused by sea level rise on coastal areas Surabaya:

Validity test is used to test the suitability of the variable with the attributes of the questionnaire prior to analysis, data are grouped based on the criteria of each question. Here is a validity test result data:

H0: The data has a relationship

H1: Data not related (independent)

H0 is rejected if the correlation is less than 70%

Table 3. Output Validity Test

|                     | P1   | P2   | P3   | P4   | P5   | P6   | P7   | P8   | P9   | P10  | P11  | P12  | P13  | P14  |
|---------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Factors Correlation | 0.92 | 0.88 | 0.83 | 0.76 | 0.76 | 0.78 | 0.74 | 0.85 | 0.93 | 0.94 | 0.73 | 0.78 | 0.75 | 0.89 |

Source : analysis result, 2012

Reliability test is a test to determine the reliability of the data can be trusted in order to detect any manipulation of the observer. In this study, the reliability of test used is the spearman born. Data is said to be reliable if R obtained R is greater than 80%. Because of the R value above 80%, then it can be stated that the data reliably in accordance with the historical because it shows the confidence level of 97.7%. So that could be done further analysis.

Multinomial logistic regression analysis is used to determine the effect of predictor variables on the response variable. Multinomial regression is used because there are three kinds of response variables, but the response variable does not have different level.

Hypothesis :

$H_0 : \beta_{x_1} = 0$  , drainage disturbance variables has no effect on the incidence of disaster due to sea level rise

$H_1 : \beta_{x_1} \neq 0$  , drainage disruption variable effects on the incidence of due to disaster sea level rise.

significance level::  $\alpha = 0.05$

Critical areas: Reject  $H_0$  if the values  $W_2$  (Wald)  $> \chi^2_{(df, \alpha)}$  or P-value  $< \alpha$

From the above table it can be seen that the P-value is valued at 0.018. The value P-value  $< 0.05$  alpha then reject  $H_0$ , so that it can be concluded that the effect of drainage disruption due to the disaster due to sea level rise.

### 3.3. Identification of a disaster due to sea level rise

Flood hazard zones due to sea level rise illustrates the level of flood hazard zone in accordance with the level of hazard from highest to lowest. Flood hazard zones derived from the overlay pool of variable height and duration of inundation. The method of analysis used in determining the level of flood hazard due to sea level rise that is by using Weighted Overlay. Each variable will be made in accordance with the hazard map data already existed and are regrouped into 5 classes. From both of these variables will be found each map and then overlay with weights on each map is 1.

### 3.4. Determining of influential factors of vulnerability

In analyzing the factors that influence vulnerability to floods due to sea level rise on coastal areas Surabaya analyzer using Delphi as a fixation of the factors that affect vulnerability and then weight factor will be determined using the AHP, where the weights are used to produce vulnerability zone maps.

With the acquisition of the weighting in each of the determinants of vulnerability assessment of flooding due to sea level rise, the next stage weighted overlay analysis using ArcGIS 9.3 sum to determine the zoning on the level of vulnerability of coastal areas Surabaya. Here is a map-making stage Vulnerability Zone.

Making a map based on sub factors affecting vulnerability of flooding due to sea level rise, wherein each of these maps will be classified into five classifications based on the Guidelines on Control of Flood Prone Areas is

- Not vulnerable
- Slightly Vulnerable
- Quite Vulnerable
- Vulnerable
- Highly Vulnerable

for such classification, the data will be compared between each existing Sub factor with the applicable standards or Surabaya in Indonesia. For example, for Sub topographic factors:

Table 4. Classification Class of Topography Based on Vulnerability Level

| Factors                | Scale   | Classification    | Explanation |
|------------------------|---------|-------------------|-------------|
| Topography of the land | >15m    | Not vulnerable    | 1           |
|                        | 10m-15m | Less vulnerable   | 2           |
|                        | 5m-10m  | Quite vulnerable  | 3           |
|                        | 2m-5m   | Vulnerable        | 4           |
|                        | 0m-2m   | Highly vulnerable | 5           |


Source : analysis result. 2012

Based on existing data, Surabaya Coastal Zone is located on the topography with a height of 0-6 meters. Therefore, when it is compared with the table it was found that the topography in Surabaya Coastal Zone is divided into three classes, namely:

- 0-2 meters (5 Classification or highly vulnerable)
- 2.1 to 5 meters (classification 4 or Vulnerable)
- 5.1 to 10 Meters (3 or fairly susceptible of classification)

From the division it will be created maps using ArcGIS 9.3. From this stage we will get a map of each sub factor. The following are the results topographic factor maps

- Having obtained a map of each sub-factor, then create a map Based on factors that influence susceptibility flooding due to Sea level rise using the overlay ArcGIS 9.3 and the weights of the AHP. Where there are 4 flood vulnerability factor (Guide Introduction Characteristics of Disasters in Indonesia and mitigation, 2005) that environmental factors, physical factors, social factors and economic factors. For example, to physical factors.
- Having found each of the four maps, all four maps will be in use arc gis overlay with weights that have been obtained from the analysis of AHP to obtain Flood Vulnerability Due to Sea Level Rise map. The following is a formulation of the vulnerability map.

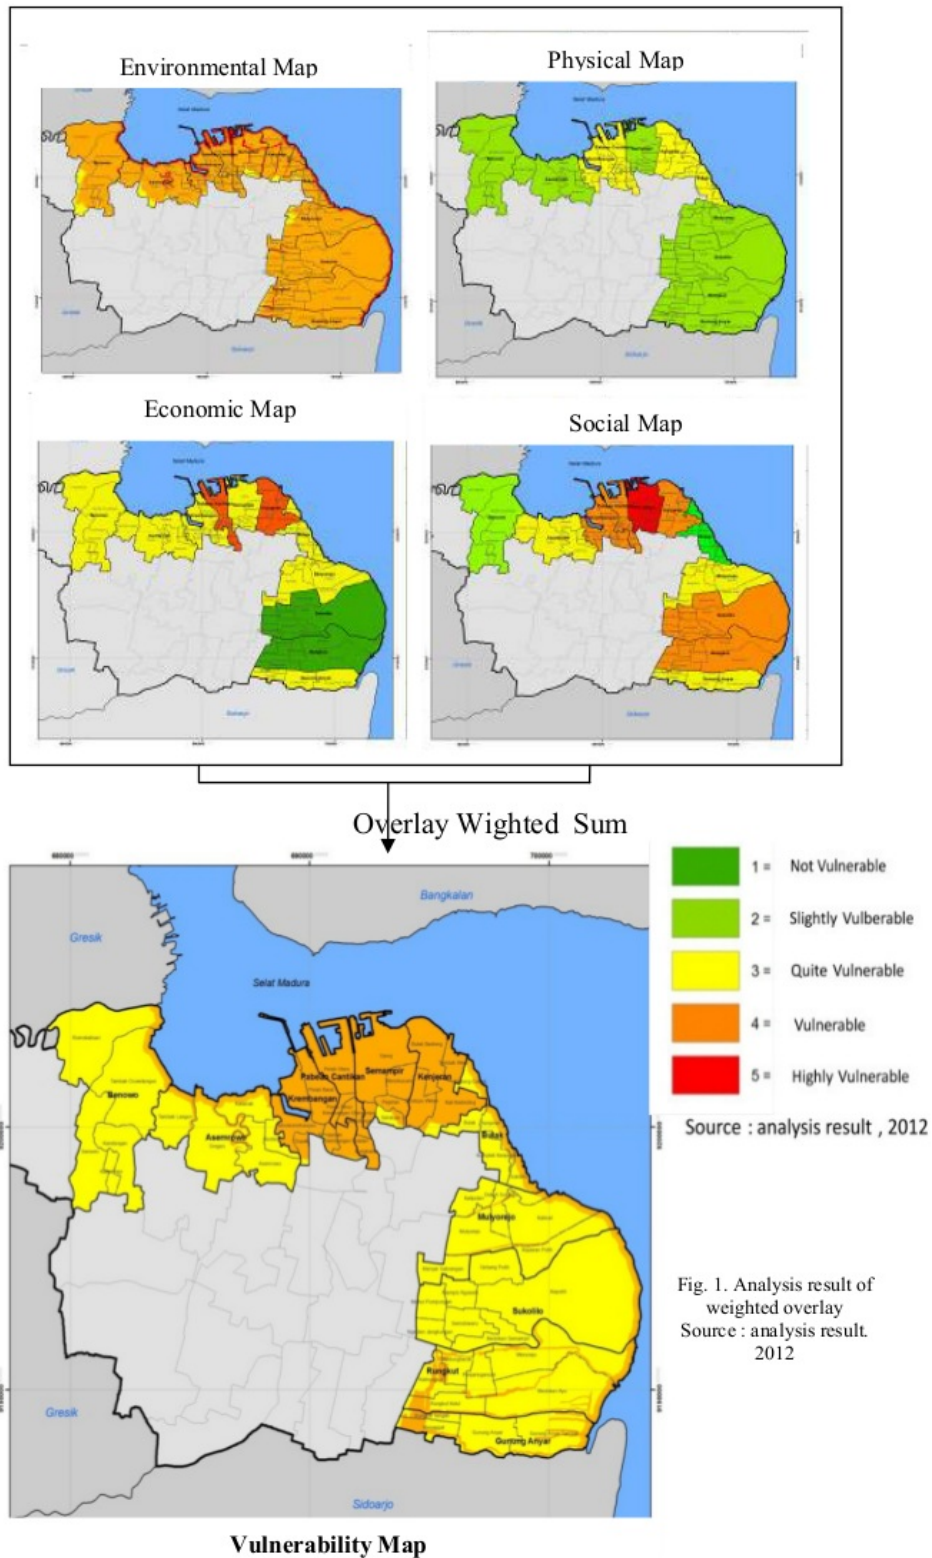

## Conclusion

Spatial distribution of the hazard rate (hazard) of floods due to sea level rise on coastal areas Surabaya is a whole sub-districts which are along the coast. Districts that have the highest level of flood hazard area due to sea level rise are Mulyorejo District, Kenjeran District, Bulak District.

Spatial distribution of zones level of floods vulnerability due to sea level rise on coastal areas along the coast of Surabaya, the areas at the highest level of vulnerability are the District Krembangan, Pabeancantikan, Semampir and Kenjeran.

Spatial distribution of zones of floods risk level due to sea level rise on coastal areas along the coast of Surabaya in Surabaya, the areas at highest risk are Krembangan District, District and Sub Asemrowo Bulak.

Influential factor in the formulation of floods risk zones due to sea level rise in coastal areas Surabaya is the height of the flood, flood duration, Replace sea water, rainfall, distance to the river Proximity, Proximity distance to the coastline, the height of topography, soil type, Tata order land, density of buildings, road networks, population density, population growth rate, elderly + toddler (aged vulnerable), household sector working farms and the number of poor households.



# Sea Level Rise Flood Zones: Mitigating Floods in Surabaya Coastal Area

## ORIGINALITY REPORT

12%

SIMILARITY INDEX

3%

INTERNET SOURCES

8%

PUBLICATIONS

6%

STUDENT PAPERS

## PRIMARY SOURCES

- 1** Submitted to Swinburne University of Technology  
Student Paper 4%
- 2** s3.amazonaws.com  
Internet Source 2%
- 3** P. C. Sinha, Y. R. Rao, S. K. Dube, T. S. Murty. "Effect of sea level rise on tidal circulation in the Hooghly Estuary, Bay of Bengal", Marine Geodesy, 1997  
Publication 1%
- 4** Prananda Navitas. "Improving Resilience against Urban Fire Hazards through Environmental Design in Dense Urban Areas in Surabaya, Indonesia", Procedia - Social and Behavioral Sciences, 2014  
Publication 1%
- 5** Imam Buchori, Angrengani Pramitasari, Agung Sugiri, Maryono Maryono, Yudi Basuki, Anang Wahyu Sejati. "Adaptation to coastal flooding and inundation: Mitigations and migration pattern in Semarang City, 1%

# Indonesia", Ocean & Coastal Management, 2018

Publication

---

|    |   |     |
|----|---|-----|
| 6  | <a href="http://www.virallagi.com">www.virallagi.com</a><br>Internet Source   | 1%  |
| 7  | <a href="http://mafiadoc.com">mafiadoc.com</a><br>Internet Source   | 1%  |
| 8  | Submitted to Bronx High School of Science<br>Student Paper  | 1%  |
| 9  | <a href="http://es.scribd.com">es.scribd.com</a><br>Internet Source   | <1% |
| 10 | An Thinh Nguyen, Anh Dung Vu, Giang T. H. Dang, Anh Huy Hoang, Luc Hens. "How do local communities adapt to climate changes along heavily damaged coasts? A Stakeholder Delphi study in Ky Anh (Central Vietnam)", Environment, Development and Sustainability, 2017<br>Publication | <1% |
| 11 | Peter J. Wilcoxon. "Coastal erosion and sea level rise: Implications for ocean beach and San Francisco's westside transport project", Coastal Zone Management Journal, 1986<br>Publication  | <1% |
| 12 | Jie Yin, Zhane Yin, Jun Wang, Shiyuan Xu. "National assessment of coastal vulnerability to sea-level rise for the Chinese coast", Journal of Coastal Conservation, 2012   | <1% |

**13** Daria L Nikitina, James E Pizzuto, Reed A Schwimmer, Kelvin W Ramsey. "An updated Holocene sea-level curve for the Delaware coast", Marine Geology, 2000 **<1%**  
Publication

---

**14** Peter J. Cowell, Thomas Q. Zeng. "Integrating Uncertainty Theories with GIS for Modeling Coastal Hazards of Climate Change", Marine Geodesy, 2003 **<1%**  
Publication

---

---

Exclude quotes    On  
Exclude bibliography    On

Exclude matches    Off