

# Coconut Shell Charcoal as Filter Material for Blackwater Purification

*by* Lies Kurniawati Wulandari

---

**Submission date:** 31-Mar-2021 12:47PM (UTC+0700)

**Submission ID:** 1547047701

**File name:** hell\_Charcoal\_as\_Filter\_Material\_for\_Blackwater\_Purification.pdf (242.97K)

**Word count:** 4259

**Character count:** 22221

# Coconut Shell Charcoal as Filter Material for Blackwater Purification

Lies Kurniawati Wulandari<sup>1</sup>, Munasih<sup>2</sup>, Ester Priskasari<sup>3</sup>

<sup>1</sup>Post Graduate Program of Civil Engineering Department, National Institut of Technology, Malang, Indonesia-65140

<sup>2,3</sup>Degree Program of Civil Engineering Department, National Institut of Technology, Malang, Indonesia-65140

**Abstract--** Blackwater is known as a type of domestic wastewater with high pollutant content, thus it has high turbidity level. In the common method of purification, blackwater is often filtered with various filter materials such as sand, gravel, and charcoal. Among those three filter materials, charcoal is the material with the most potential since it is able to remove the suspended solids and chemical pollutants thanks due to its carbon content. This study aimed to investigate the effectiveness of coconut shell charcoal as a filter material for blackwater purification. Coconut shell charcoal was chosen for research because it is relatively easy to obtain and inexpensive. These two factors are important considerations in formulating wastewater treatment for developing countries like Indonesia. This study also sought to determine the best filter layer thickness and the most optimal blackwater waste discharge in the treatment of turbidity reduction. The research data was the level of blackwater turbidity. The treatment of filter layer was using the thickness variations of 10 cm, 15 cm, 20 cm, and 30 cm. In addition, different residence times were applied, starts from 1 to 9 day. The result of Regression analysis showed that the thickness of the charcoal filter layer, as well as the wastewater discharge, had a significant effect on the reduction of blackwater turbidity. The best treatment was 30 cm of charcoal thickness with 9 days of residence time. Therefore, it can be stated that coconut shell charcoal is truly potential to be used as a blackwater waste filter material. In addition, this method can be easily applied by the community, especially in developing countries as the material is easy to get and the method doesn't require high budget.

**Keywords--** Blackwater, Turbidity, Coconut shell charcoal.

## I. INTRODUCTION

The sanitation and waste management in Indonesia, especially in East Java, requires serious attention from various parties. The lag in the field of sanitation development has triggered various problems, including decreasing the quality of groundwater and surface water (river), air pollution to decreasing the level of public health which ultimately weakens the competitiveness of the nation. It has been revealed in various media that pollution of groundwater in various cities reaches 80%, where about 75% of the river has been polluted. In order to avoid increasingly worsening environmental and public health problems. Bappedada (The agency of planning and regional development) East Java, which is now changed into the Environmental Agency (BLH) develop the program for wastewater treatment by promoting the application of communal wastewater treatment and water pollution control.

The communal WWTP is useful for processing domestic wastewater until its output meets the quality standard so that it no longer pollutes the environment. However, the experience that occurred in Malang City proves that the construction and delivery of sanitation facilities such as WWTP, even though it has gone through a process that seems good, but in reality will not function optimally in the next few years. The lessons learned from the experience of community failure in managing communal WWTPs in Malang City are due to the introduction of a non-sustainable management system (closing cycle), and if this management system is not immediately applied, it is almost certain that failure after failure will occur in East Java and even throughout Indonesia, because all of them do not have a sustainable management system. If the example of the preservation of communal IPAL management cannot yet be demonstrated, the MDGs (Millennium Development Goals) in

the form of improved sanitation facilities in Indonesia which should reach 70% in 2015 will be difficult to realize.

Sustainability (Sustainability) is the process of determining the achievement of the balance of fruit three aspects, namely: 1) economic development; 2) improvement of community resources (HR), and 3) strengthening the environment at the local level. The process towards sustainability can be done by testing, developing and disseminating procedures for developing the economic level of the community in such a way that the ecosystem gets protection due to an increase in living standards (ICLEI, IDRC and UNEP 1996).

The economic development of communal IPAL management communities, even local people should be able to be improved. While this effort towards it is still not done. Wherever communal WWTPs are built, there have not been any efforts that have led to the idea of improving the community's economy due to the existence of the WWTP. Currently, there are many developments in *Sanimas* program (community sanitation) in several cities in East Java (for example: in Blitar, Batu and Kepanjen). The system applied is levied for people who use the communal WWTP facilities in the form of usage fees. In reality, this system cannot work effectively because "managers" do not "have the heart" to withdraw contributions if those who use toilet or bathroom facilities are neighbors, friends or even their own families. Things like this reduce the sustainability of this facility. The good goal of obtaining funds for the care of communal WWTPs cannot be achieved, especially to improve the economy of the community.

This processing is carried out on liquid waste containing waste materials which can be separated mechanically directly without the addition of chemicals or through biological destruction. Physical processing of liquid waste can be done by

filtration and sedimentation (Manurung et al., 2004). Sedimentation is a solid-liquid separation process by depositing suspended particles in the presence of gravity. According to Kagaya et al., (1999), waste treatment by sedimentation is the process of deposition of organic compounds in waste without any treatment. However, sedimentation processing is not efficient to use, because the process is slow, especially if the waste is in sufficiently large quantities even though the cost is relatively cheap. Filtration is a solid-liquid separation process through a filter (filter). Filtration is one form to produce high-efficiency waste solids. When compared with the processing of sedimentation, filtration requires a relatively expensive cost, besides that the effectiveness of the membrane rapidly decreases because the pores are likely to be covered by organic particulates.

By far, researchers have seen that there has been no further processing related to efforts to improve the quality of wastewater entering the river bodies. Based on the condition of the area surveyed, the facilities and resources in processing waste are only functioned functionally and do not pay attention to system improvement and optimization of existing resources. Thus, it is necessary to improve the design of the blackwater waste treatment system at WWTP to improve the quality of external water so that it is suitable to be dumped into rivers or reused as agricultural water. For this reason, researchers conducted research by utilizing materials that were easily obtained at relatively affordable prices, namely coconut shell charcoal. shell charcoal has good potential to help purify wastewater because of its active carbon content (Cobb et al. 2012). This study aims to apply coconut shell charcoal as a filter material in blackwater waste treatment, which is to determine the thickness of the charcoal layer, the residence time, and the recommended maximum discharge to be able to produce good output.

## II. METHOD

To achieve these objectives, a method of data collection and data analysis is needed. The method of data collection carried out there are two stages, namely sampling in the field and in the laboratory which consists of a field test that is observing from the treatment of wastewater waste. Test laboratories with water taken from communal septic tanks. The physical model of the experiment was made on a laboratory scale, by making a filter tub measuring 25 x 60 cm. Furthermore, the material used as filter material is coconut shell charcoal which is applied with variations in the thickness of 10 cm, 15 cm, 20, and 30 cm.

This study uses an experimental quantitative method with observed variables, namely the thickness of the charcoal filter layer, the variation of discharge, and residence time as the independent variable, as well as the level of turbidity as the dependent variable. The data analysis method used is Regression with linear and exponential equations with the help of SPSS 21 program.



Fig. 1. Coconut shell charcoal

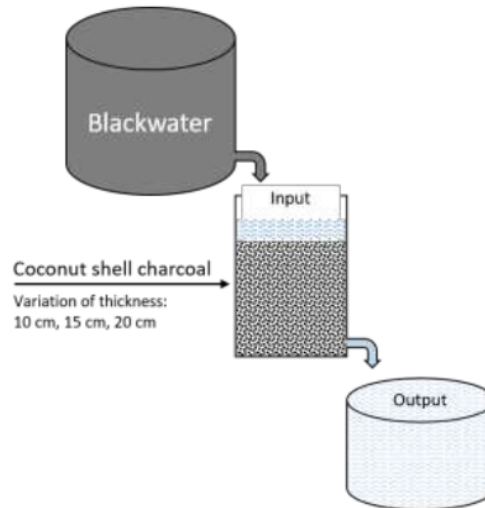


Fig. 2. Filter mechanism

## III. RESULT AND DISCUSSION

### A. The Decrease of Blackwater Turbidity Base on Each Treatment

Based on the measurement results, the initial levels of blackwater waste turbidity are 1000 NTU. In addition, the turbidity level based on Government Regulation (PP) is 25 NTU. The following is presented the data on the measurement of the turbidity of blackwater processed through a filtration method with a thickness of 10 cm:

TABLE 1. Turbidity level of blackwater filtered with 10 cm thickness of the charcoal layer

| Volume (liter/day) | Turbidity Level (NTU) |                  | Residence Time (Day) |
|--------------------|-----------------------|------------------|----------------------|
|                    | Morning sample        | Afternoon sample |                      |
| 100                | 1000                  | 950              | 0                    |
|                    | 925                   | 850              | 1                    |
|                    | 700                   | 720              | 2                    |
| 120                | 560                   | 600              | 3                    |
|                    | 470                   | 550              | 4                    |
|                    | 350                   | 480              | 5                    |
|                    | 275                   | 390              | 6                    |
| 140                | 255                   | 300              | 7                    |
|                    | 240                   | 270              | 8                    |
|                    | 230                   | 250              | 9                    |

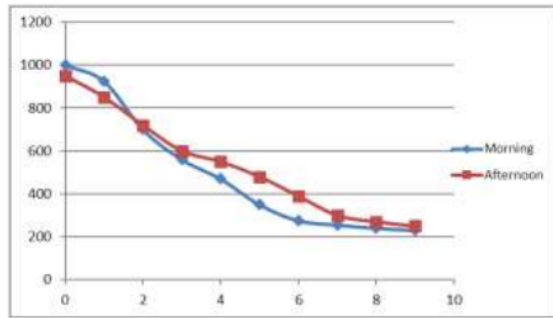


Fig. 3. Turbidity level from the treatment charcoal filter 10 cm

Based on the table above, it can be seen that the initial turbidity of blackwater waste before processing reaches greater than 1000 NTU in blackwater taken in the morning, and 950 NTU in blackwater taken in the afternoon. Filtering with a single filter from the first day to the 9th day shows that the level of continuous blackwater turbidity has decreased to reach 230 NTU in the morning blackwater sampling, and 215 NTU in the blackwater sampling in the afternoon. Because it has not met regulatory standards, it is followed by variations in the thickness of charcoal. The following is presented the data on the turbidity measurement of the blackwater treated through a filtration method with charcoal thickness of 15 cm:

TABLE 2. Turbidity level of blackwater filtered with 15 cm thickness of the charcoal layer

| Volume (liter/day) | Turbidity Level (NTU) |                  | Residence Time (Day) |
|--------------------|-----------------------|------------------|----------------------|
|                    | Morning sample        | Afternoon sample |                      |
| 100                | 1000                  | 950              | 0                    |
|                    | 900                   | 825              | 1                    |
|                    | 800                   | 750              | 2                    |
| 120                | 550                   | 680              | 3                    |
|                    | 470                   | 610              | 4                    |
|                    | 400                   | 540              | 5                    |
|                    | 325                   | 410              | 6                    |
| 140                | 300                   | 325              | 7                    |
|                    | 225                   | 250              | 8                    |
|                    | 185                   | 215              | 9                    |

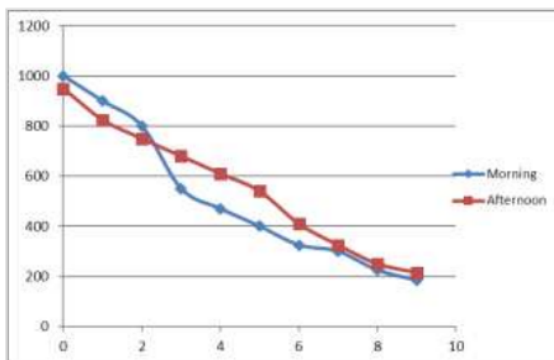


Fig. 4. Turbidity level from the treatment charcoal filter 15 cm

Based on the table above, it can be seen that the initial turbidity of blackwater waste before processing reaches greater

than 1000 NTU in blackwater taken in the morning, and 950 NTU in blackwater taken in the afternoon. Filtering with a single filter from the first day to the 9th day shows that the blackwater turbidity level continues to decline until it reaches 185 NTU in the morning blackwater sampling, and 215 NTU at the blackwater sampling in the afternoon. Because it has not met regulatory standards, it is followed by variations in the thickness of charcoal. The following is presented the data on the turbidity measurement of the blackwater treated through a filtration method with a thickness of 20 cm:

TABLE 3. Turbidity level of blackwater filtered with 20 cm thickness of the charcoal layer

| Volume (liter/day) | Turbidity Level (NTU) |                  | Residence Time (Day) |
|--------------------|-----------------------|------------------|----------------------|
|                    | Moming sample         | Afternoon sample |                      |
| 100                | 1000                  | 950              | 0                    |
|                    | 760                   | 800              | 1                    |
|                    | 600                   | 710              | 2                    |
| 120                | 490                   | 650              | 3                    |
|                    | 410                   | 580              | 4                    |
|                    | 350                   | 495              | 5                    |
|                    | 285                   | 385              | 6                    |
| 140                | 265                   | 300              | 7                    |
|                    | 190                   | 250              | 8                    |
|                    | 110                   | 195              | 9                    |

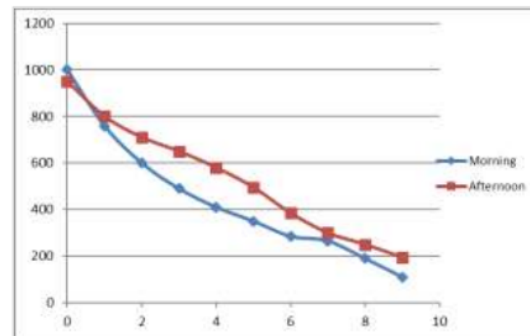


Fig. 5. Turbidity level from the treatment charcoal filter 20 cm

Based on the table above, it can be seen that the initial turbidity of blackwater waste before processing reaches greater than 1000 NTU in blackwater taken in the morning, and 950 NTU in blackwater taken in the afternoon. Filtering with a single filter from the first day to the 9th day shows that the level of continuous blackwater turbidity has decreased to reach 110 NTU in the morning blackwater sampling, and 195 NTU in the blackwater sampling in the afternoon. Because it has not met regulatory standards, it is continued with the treatment of 30 cm char thickness which can be seen in the following table 4.

Based on the table below, it can be seen that the initial turbidity of blackwater waste before processing reaches greater than 1000 NTU in blackwater taken in the morning, and 950 NTU in blackwater taken in the afternoon. Filtering with a single filter from the first day to the 9th day shows that the blackwater turbidity level continues to decline to reach 22 NTU in the morning blackwater sampling, and 26 NTU at the blackwater sampling in the afternoon. Because it has fulfilled



the requirements of the government regulation on Sanitaisi, namely 25 Ntu, the research was stopped.

TABLE 4. Turbidity level of blackwater filtered with 30 cm thickness of the charcoal layer

| Volume (liter/day) | Turbidity Level (NTU) |                  | Residence Time (Day) |
|--------------------|-----------------------|------------------|----------------------|
|                    | Morning sample        | Afternoon sample |                      |
| 100                | 1000                  | 950              | 0                    |
|                    | 560                   | 700              | 1                    |
|                    | 480                   | 550              | 2                    |
| 120                | 390                   | 470              | 3                    |
|                    | 280                   | 320              | 4                    |
|                    | 150                   | 225              | 5                    |
|                    | 125                   | 190              | 6                    |
| 140                | 100                   | 160              | 7                    |
|                    | 35                    | 45               | 8                    |
|                    | 22                    | 26               | 9                    |

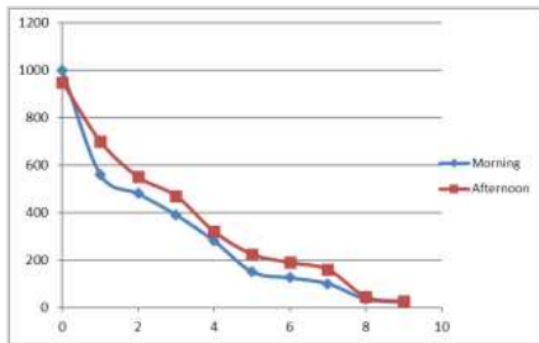


Fig. 6. Turbidity level from the treatment charcoal filter 30 cm

**B. The effect of charcoal filter thickness on the decrease of turbidity level**

*Linear Regression*

Table 5 presents a summary of the results of Linear Regression analysis on blackwater data obtained in the morning, specifically related to the effect of thickness of shell charcoal with turbidity levels.

TABLE 5. The result of linear regression on the morning sample

| Independent Var.          | Coefficient | P     | R <sup>2</sup> | Equation                     |
|---------------------------|-------------|-------|----------------|------------------------------|
| Charcoal filter thickness | -10,144     | 0,002 | 7,6%           | $Y = 717,871 - 10,144 X + e$ |

Based on the table above, it can be seen that the results of the analysis of Linear Regression between shell charcoal and turbidity in morning processing show a regression coefficient of -10.144, with a significance value of 0.002 (<0.05). Thus, it can be stated that the thickness of shell charcoal has a significant negative effect on the turbidity of treated wastewater. In other words, the thicker the shell charcoal layer is used for filtration, the more potential it will be in reducing turbidity levels. The coefficient of determination obtained from regression analysis is 7.6%, where this number represents the effect of the thickness treatment of shell charcoal applied to the level of turbidity of treated wastewater. The rest (92.4%) is the percentage of the influence of variables or other factors, other than the thickness of the shell charcoal treatment applied.

Furthermore, the results of the Linear Regression analysis (Table 6) are explained in the blackwater data obtained in the afternoon, specifically related to the effect of thickness of shell charcoal with turbidity levels.

TABLE 6. The result of linear regression on the afternoon sample

| Independent Var.          | Coefficient | p     | R <sup>2</sup> | Equation                    |
|---------------------------|-------------|-------|----------------|-----------------------------|
| Charcoal filter thickness | -9,380      | 0,002 | 8,2%           | $Y = 746,300 - 9,380 X + e$ |

Based on the table above, it can be seen that the results of the analysis of Linear Regression between shell charcoal and turbidity in afternoon processing show a regression coefficient of -9.380, with a significance value of 0.002 (<0.05). Thus, it can be stated that the thickness of shell charcoal has a significant negative effect on the turbidity of treated wastewater. In other words, the thicker the shell charcoal layer is used for filtration, the more potential it will be in reducing turbidity levels. The coefficient of determination obtained from regression analysis is 8.2%, where this number represents the effect of the thickness treatment of shell charcoal applied to the turbidity level of treated wastewater. The rest (91.8%) is the percentage of influence of variables or other factors, other than the thickness of the shell charcoal treatment applied.

*Non-Linear Regression (Exponential)*

Table 7 presents a summary of the results of the Exponential Regression analysis on blackwater data obtained in the morning, specifically related to the effect of thickness of shell charcoal with turbidity levels.

TABLE 7. The result of exponential regression on the morning sample

| Independent Var.          | Coefficient | p     | R <sup>2</sup> | Equation                     |
|---------------------------|-------------|-------|----------------|------------------------------|
| Charcoal filter thickness | -0,033      | 0,000 | 13,1%          | $Y = 823,924^{-0,033 X} + e$ |

Based on the table above, it can be seen that the results of the Exponential Regression analysis between shell charcoal and turbidity in morning processing show a regression coefficient of -0.033, with a significance value of 0.000 (<0.05). Thus, it can be stated that the thickness of shell charcoal has a significant negative effect on the turbidity of treated wastewater. In other words, the thicker the shell charcoal layer is used for filtration, the more potential it will be in reducing turbidity levels. The coefficient of determination obtained from regression analysis is 13.1%, where this number represents the effect of the thickness treatment of shell charcoal applied to the level of turbidity of treated wastewater. The rest (86.9%) is the percentage effect of variables or other factors, other than the thickness of the shell charcoal treatment applied. Furthermore, a summary of the results of the Exponential Regression analysis on the blackwater data obtained in the afternoon is explained, specifically related to the effect of thickness of shell charcoal with turbidity levels.

TABLE 8. The result of exponential regression on the afternoon sample

| Independent Var.          | Coefficient | p     | R <sup>2</sup> | Equation                     |
|---------------------------|-------------|-------|----------------|------------------------------|
| Charcoal filter thickness | -0,029      | 0,000 | 12,4%          | $Y = 855,090^{-0,029 X} + e$ |

Based on the table above, it can be seen that the results of the Exponential Regression analysis between shell charcoal and turbidity in afternoon processing show a regression coefficient of -0.029, with a significance value of 0.000 (<0.05). Thus, it can be stated that the thickness of shell charcoal has a significant negative effect on the turbidity of treated wastewater. In other words, the thicker the shell charcoal layer is used for filtration, the more potential it will be in reducing turbidity levels. The coefficient of determination obtained from regression analysis is 12.4%, where this number represents the effect of the thickness treatment of shell charcoal applied to the level of turbidity of treated wastewater. The rest (87.6%) is the percentage effect of variables or other factors, other than the thickness of the shell charcoal treatment applied.

C. The effect of blackwater volume on the decrease of turbidity level

Linear Regression

Table 9 presents a summary of the results of Linear Regression analysis on blackwater data obtained in the morning, specifically related to the effect of water discharge with turbidity levels.

TABLE 9. The result of linear regression on the morning sample

| Independent Var.  | Coefficient | p     | R <sup>2</sup> | Equation                  |
|-------------------|-------------|-------|----------------|---------------------------|
| Blackwater volume | 4,566       | 0,002 | 7,5%           | Y = -20,275 + 4,566 X + e |

Based on the table above, it can be seen that the results of the analysis of Linear Regression between water discharge and turbidity in morning processing show a regression coefficient of 4.566, with a significance value of 0.002 (<0.05). So, it can be stated that water discharge has a significant positive effect on the turbidity of treated wastewater. In other words, the higher the water discharge used, the higher the turbidity level. The coefficient of determination obtained from the regression analysis is 7.5%, where this number represents the effect of the treatment of applied water discharge on the turbidity level of treated wastewater. The rest (92.5%) is the percentage of the influence of variables or other factors, apart from the treatment of water discharge applied. Furthermore, the results of the Linear Regression analysis on blackwater data obtained in the afternoon are explained, especially related to the effect of water discharge with turbidity levels.

TABLE 10. The result of linear regression on the afternoon sample

| Independent Var.  | Coefficient | p     | R <sup>2</sup> | Equation                  |
|-------------------|-------------|-------|----------------|---------------------------|
| Blackwater volume | 3,731       | 0,006 | 6,3%           | Y = 122,675 + 3,731 X + e |

Based on the table above, it can be seen that the results of the analysis of Linear Regression between water discharge and turbidity in afternoon processing show a regression coefficient of 3.731, with a significance value of 0.006 (<0.05). So, it can be stated that water discharge has a significant positive effect on the turbidity of treated wastewater. In other words, the higher the water discharge used, the higher the turbidity level. The coefficient of determination obtained from the regression analysis is 6.3%, where this number represents the effect of the

treatment of applied water discharge on the turbidity level of treated wastewater. The rest (93.7%) is the percentage of the influence of variables or other factors, other than the treatment of water discharge applied.

Exponential Regression

Table 11 presents a summary of the results of the Exponential Regression analysis on blackwater data obtained in the morning, specifically related to the effect of water discharge with turbidity levels.

TABLE 11. The result of exponential regression on the morning sample

| Independent Var.  | Coefficient | p     | R <sup>2</sup> | Equation                          |
|-------------------|-------------|-------|----------------|-----------------------------------|
| Blackwater volume | 0,013       | 0,000 | 10,1%          | Y = 89,863 <sup>0,013 X + e</sup> |

Based on the table above, it can be seen that the results of Exponential Regression analysis between water discharge and turbidity in morning processing show a regression coefficient of 0.013, with a significance value of 0.000 (<0.05). So, it can be stated that water discharge has a significant positive effect on the turbidity of treated wastewater. In other words, the higher the water discharge used, the higher the turbidity level. The coefficient of determination obtained from regression analysis is 10.1%, where this number represents the effect of the treatment of applied water discharge on the turbidity level of treated wastewater. The rest (89.9%) is the percentage of the influence of variables or other factors, other than the treatment of water discharge applied. Furthermore, the results of the Exponential Regression analysis on the blackwater data obtained in the afternoon are explained, especially related to the effect of water discharge with turbidity levels.

TABLE 12. The result of exponential regression on the afternoon sample

| Independent Var.  | Coefficient | p     | R <sup>2</sup> | Equation                           |
|-------------------|-------------|-------|----------------|------------------------------------|
| Blackwater volume | 0,010       | 0,002 | 7,7%           | Y = 145,536 <sup>0,010 X + e</sup> |

Based on the table above, it can be seen that the results of Exponential Regression analysis between water discharge and turbidity in afternoon processing show a regression coefficient of 0.010, with a significance value of 0.002 (<0.05). So, it can be stated that water discharge has a significant positive effect on the turbidity of treated wastewater. In other words, the higher the water discharge used, the higher the turbidity level. The coefficient of determination obtained from the regression analysis is 7.7%, where this number represents the effect of the treatment of applied water discharge on the turbidity level of treated wastewater. The rest (92.3%) is the percentage of the influence of variables or other factors, other than the treatment of water discharge applied.

IV. CONCLUSION

Based on the results, it can be concluded that the filtration method using coconut shell charcoal is able to reduce the turbidity level of blackwater. The best result was obtained from the treatment of 30 cm charcoal thickness with 9 days of residence time. In addition, the best final results from each samples (morning and evening samples) were 22 and 26 NTU, respectively. Those results have met the standard. Therefore, the use of coconut shell charcoal for blackwater purification is

highly recommended. On the other hand, further studies are suggested to investigate the effect of coconut shell charcoal as filter material on decrease of other parameters.

#### REFERENCES

- [1] Adhibaswara B., I Prasetya I.R., Nico M., Muzdalifah Z., 2011. *Pengelolaan Air Secara Ekonomis Dengan Penggunaan Tanggul Batang Kelapa Serta Penjernih Air Alami*. Proceeding PgESAT (Psikologi, Ekonomi, Astronomi, Arsitektur & Sipil) Universitas Gunadarma-Depok 18-19 Oktober 2011 Vol.4 Oktober 2011 ISSN:1858-2559.
- [2] Cobb, Ami, Mikell, W., Edwin, P. Maurer, & Steven Chiesa. 2012. Low-Tech Coconut Shell Activated Charcoal Production. *International Journal for Service Learning in Engineering*. Vol. 7, No. 1, pp: 93-104.
- [3] Departemen Kesehatan. 1990. Peraturan Menteri Kesehatan No.416/MENKES /PER/IX/1990 tentang Syarat-syarat dan Pengawasan Kualitas Air. Jakarta.
- [4] E.B. Muller, A.H. Stouthamer, H.W., van Verseveld, dan D.H. Eikelboom. 1994. Aerobic Domestic Waste Water Treatment In a Pilot Plant with Complete Sludge Retention by Cross-Flow Filtration. *Water Research*. No.29, pp: 1179-1189.
- [5] MCK Terpadu, Kelurahan Tlogomas Kota Malang. Keltlogomas.malangkota.go.id>mck-terpadu<http://sosok.wordpress.com/2006/12/13/agus-gunarto-dan-kawasan-mck-terpadu/html>
- [6] Palmeira, E.M., R.J Fannin, dan Y.P Vaid., 2011. A Study on The Behaviour of soil – Geotextile Systems in Filtration Test. *Canadian Geotechnical Journal*. Vol.33, No.6, pp:899-912. <https://doi.org/10.1139/t96-120>.

# Coconut Shell Charcoal as Filter Material for Blackwater Purification

---

## ORIGINALITY REPORT

---

**3%**

SIMILARITY INDEX

**3%**

INTERNET SOURCES

**0%**

PUBLICATIONS

**3%**

STUDENT PAPERS

---

## PRIMARY SOURCES

---

**1**

**Submitted to LL Dikti IX Turnitin Consortium**

Student Paper

**3%**

---

Exclude quotes  On

Exclude matches  < 2%

Exclude bibliography  On