



Call for Papers

Major tracks of interest include, but not limited to the following

Technology Innovation in Information Technology

- Artificial Intelligence and Its Applications**
 Genetic Computation
 Fuzzy Logic and Control
 Neural Networks
 Pattern Recognition
 Smart Web Applications
 Intelligent and Multi-Agent Systems
 e-Health, Smart Learning, Intelligent Processing
 Computer Vision Applications
 Smart Cloud Technology
- Internet of Things (IoT)**
 ICT Architecture for IoT
 Real-Time Systems for IoT
 Embedded Internet
 Mobile Computing & Applications
 Smart Appliances & Wearable Computing Devices
 Information Infrastructure for Smart Living Spaces

Technology Innovation in Electrical and Electronics

- Mechatronics and Robotics
 Power System and Smart Grid
 Distributed Generation
 Electrical Machines, Power Electronics and Drive
 Control and Automation
 Embedded System, Sensors, Actuators
 Communication, Networks, and Information Theory
 Computer Engineering
 Signal, Image, Speech and Information Processing
 Circuits and Systems
 Designing
 Renewable Energy
 Energy Planning and Policy
 Energy Science and Technology
 Efficient Resource Utilization
 Climate Change Mitigation
 Green Architecture, Energy in Building

Publication

After a careful refereeing process, selected papers will be submitted and published on **IEEE Web of Conferences** proceeding and Journal Indexed Scopus and Scinago.

Best Paper Award

The Award is given to recognize the best two papers presented at the ICESTI 2019. One award is for a paper emphasizing contributions to theory and the other emphasizing significant or innovative applications. The papers must have been presented by the awardee or a co-author. Criteria for selection include the quality of the writing, and originality, the technical contribution, timeliness, and practicality.

Important Dates

Extended abstract submission	30 May 2019
Notification of abstract acceptance	10 June 2019
Full paper submission	29 June 2019
Notification of acceptance	30 June 2019
Final paper submission and registration	13 July 2019

24-27 October 2019

Binang Bali Resort Hotel
 Jl. Kartika Plaza, South Kuta Beach,
 Kuta Bali 80361, Indonesia

Keynote Speakers



Prof. Yosuke Nakarishi, Ph.D
 Wakai School of Engineering and Energy Engineering
 Wakai University, Japan



Prof. Dr. Ir. Mauridhi Hery Purnomo, M.Eng
 Graduate Electrical Department
 Institut Teknologi Sepuluh Nopember, Indonesia



Prof. Giovanni Berselli, Ph.D.
 Department of Mechanical Engineering, Energy Management and Transport
 University of Insubria, Italy



Prof. Dong-Seong Kim
 Department of Electrical Engineering
 Seoul National Institute of Technology, Korea

Registration

Conference Fee	Early Bird		After 10 July 2019	
	International	Local	International	Local
First paper (up to 6 pages)	USD 400	Rp 4,000,000	USD 450	Rp 4,500,000
Each additional paper	USD 200	Rp 2,000,000	USD 300	Rp 3,000,000
Extra page of accepted papers	USD 50	Rp 500,000	USD 60	Rp 600,000
Accompanying delegates	USD 150	Rp 1,500,000	USD 180	Rp 1,800,000
Local travel (half day tour)	USD 0 (optional)	Rp 500,000	USD 0 (optional)	Rp 500,000

Note:

- All lead authors for each accepted full paper must pre-register.
- Additional papers must contain the same list of authors with your paper and we will only if submitted by the same authors whose name listed in first accepted paper.
- Two papers, although have the same corresponding author but with different list of authors, will be treated as new registered from different participant. Hence, first paper registration fee will be applied for each case. Since all accepted papers will be published in the designated international journal, a program book and CD contain conference program and list of abstracts is going to be provided for all participants.
- Registration fee for author presenting their paper or for accompanying delegates includes conference kit, lunch-coffee break and conference dinner is included in the program, however, attending all technical and parallel sessions and journal publication. Please be noted that registration fee made under one name of participant entitled for one focus of conference dinner.
- The social event is optional at the cost of USD 50 or Rp 500,000, booking is required at least at Day 2. The itinerary of the event will be informed later.

Wire Transfer Payment Method

Receiver: **Primo Bank Subitawati**
 Bank: **BCA**, Account Number: **8062011237**, Swift Code: **CENADIA**
 Note: Any bank correspondence charge should be bear by sender. Committee only receive full amount. Please write the Invoice Number on your payment description.

for more information <http://www.icesti.org>



contact person

For paper submission and conference related queries, please send email to icesti2019@gmail.com
 Awan IS Kusanto, Ph.D. (+628117266706), Dr. Irena Ruti Subitawati (+62812-206-054)

flagship conference and is organized by



INSTITUT TEKNOLOGI NASIONAL MALANG
 Smart and Intelligent

collaboration with



UNIVERSITAS CIPUTRA
 CREATING NEW GLOBAL ENTREPRENEURS

supported by



DSU Dongseon
 University of Korea





Preface 4th ICESTI 2019

This proceeding includes the original, peer-reviewed research papers from the 4th International Conference on Electrical Systems, Technology and Information (ICESTI 2019), held during 24-27 October 2019, at Bintang Bali Resort Hotel, Kuta, Bali, Indonesia.

The primary objective of this proceeding is to provide references for dissemination and discussion of the topics that have been presented in the conference. This volume is unique in that it includes work related to Electrical Engineering, Technology and Information towards their sustainable development. Engineers, researchers as well as lecturers from universities and professionals from industry and government will gain valuable insights into interdisciplinary solutions in the field of Electrical Systems, Technology and Information, and its applications.

It explores emerging technologies and their application in a broad range of engineering disciplines, including communication technologies, smart grids, and renewable energy. It examines hybrid intelligent and knowledge-based control, embedded systems, and machine learning. It also presents emerging research and recent application in green energy system and storage. It discusses the role of electrical engineering in biomedical, industrial and mechanical systems, as well as multimedia systems and applications, computer vision and image and signal processing.

In the conference there were three invited papers, entitled: “Power System Planning for Energy Transition”, “CAE Based Method for Designing Compliant Mechanism”, “The Role of Deep Learning in Computational of Power System Operation”, and “Reliability and Real Time in Industrial IoT”, and one invited speaker with the topic of “Grid Integration of Renewable Energy Technical Challenge to Technological Solution”.

This conference was also attended by special guests from e-Asia Joint Research Project, a research collaboration among four countries, Institut Teknologi Nasional Malang supported by RISTEKDIKTI, Waseda University supported by Japan Science and Technology Agency, Mindanao State University-Iligan Institute of Technology supported by DOST, The Philippines, and NECTEC research center supported by Nasdaq Thailand. This collaborative research focuses on Energy Infrastructure in e-Asia Countries.

The Proceedings of the 4th ICESTI 2019 consists of 27 selected articles, amount 24 of them were the results of joint research by Indonesian and overseas scholars. In the collaboration research, 32 institutions were involved 18 of which were from abroad Indonesia. The overseas institutions are from Australia, Estonia, Germany, India, Japan, Latvia, Lithuania, Malaysia, the Netherlands, Palestine, Philippines, Republic of China, Singapore, Sweden, & United Kingdom. Editing procedures were held by scholars from four countries (Estonia, Georgia, India, Indonesia)

In addition, we are really thankful for the contributions and for the valuable time spent in the review process by our Advisory Boards, Committee Members and Reviewers. Also, we appreciate our collaboration partners (Petra Christian University, Surabaya; University of Ciputra, Surabaya), and also to our keynote and invited speakers from Graduate School

of Environment and Energy Engineering, Waseda University, Japan; Department of Mechanical Engineering, Energy, Management, and Transport University of Genoa, Italy, Department of Electrical Engineering, Kumoh National Institute of Technology, South Korea, Department of Electrical Engineering, Sepuluh Nopember Institute of Technology, Surabaya, and School of Information Technology and Electrical Engineering, The University of Queensland, respectively. And also thanked to Department of Electrical Engineering, National Institute of Technology, Malang, Indonesia, Bintang Bali Resort Hotel, Kuta, Bali, E3S Web of Conferences, and “*Rumah Paper Kita*” as editing and proofreading services.

On behalf of the Organizing Committee



Abraham Lomi
General Chairman

Principal Editor: Roy Hendroko Setyobudi (Malang, IDN)

Board of Editor: Juris Burlakovs (Tartu, EST), Peeyush Soni (Kharagpur, IND),
Rangga Kala Mahaswa (Yogyakarta, IDN), and Tsitsino Turkadze (Kutaisi, GEO).

SCIENTIFIC and EDITORIAL BOARD

- Ahmed H. Chebbi, University of Monastir, TUN.
- Awan Uji Krismanto, National Institute of Technology, Malang, IDN.
- Esko Alasaarela, Oulu University, FIN.
- Farid Parvari Rad, University of Bologna, ITA.
- Felix Pasila, Petra Christian University, IND.
- Hamid Ali Abed Alasadi, Basra University, IRQ.
- Haryo Wibowo, Institute of Energy and Power Engineering, Zhejiang University of Technology, CHN.
- Heung-Kuk Jo, Dongseo University, KOR.
- Irrine Budi Sulistiawati, National Institute of Technology, Malang, IDN.
- Juramirza Kayumov, Namangan Institute of Engineering and Technology, UZB.
- Juris Burlakovs – Estonian University of Life Sciences, EST.
- Mithulananthan Madarajah, The University of Queensland, AUS.
- Peeyush Soni, Indian Institute of Technology Kharagpur, IND.
- Praptiningsih Gamawati Adinurani, Merdeka University of Madiun and RP Editage Services, IDN.
- Rangga Kala Mahaswa, Universitas Gadjah Mada and RP Editage Services, IDN.
- Resmana Lim, Petra Christian University, IDN.
- Roy Hendroko Setyobudi, University of Muhammadiyah Malang and RP Editage Services, IDN
- Sotyohadi, National Institute of Technology, Malang, IDN.
- Michael Lund, University of Bremen, DEU.
- Muhammad Khairurijal, Universitas Gadjah Mada and RP Editage Services, IDN.
- Nu Rhahida Arini, University of Southampton, UK.
- Qiaoling Meng, University of Shanghai for Science and Technology, CHN.
- Souvik Pal, Nalanda Institute of Technology, IND.
- Sukumar Kamalasan, University of North Carolina Charlotte, USA.
- Tsitsino Turkadze, Akaki Tsereteli State University, GEO.
- Zahrah Nurfadhilah, Universitas Gadjah Mada and RP Editage Services, IDN.

4th ICESTI 2019 is the flagship conference and is organized by:



National Institute of Technology, Malang, Indonesia and
E3S—Web of Conferences, EDP Sciences, Paris, France

Collaboration Partner



Supported By





Bintang *B* Bali
Resort

4th ANNUAL 2019
ICESTI
INTERNATIONAL CONFERENCE ON ELECTRICAL
SYSTEMS, TECHNOLOGY & INFORMATION

Venue



**The Venue of the 4th ICESTI 2019,
Bintang Bali Resort Hotel, Bali, Indonesia**



Photo Session



Delivered Gift to Keynote Speaker
Left: Prof. Abraham Lomi,
General Chairman ICESTI 2019
Right: Prof. Giovanni Berselli, Ph.D.



Delivered Gift to Keynote Speaker
Left: Prof. Abraham Lomi,
Right: Prof. Dong-Seong Kim



Delivered Gift to Keynote Speaker
Left: Prof. Abraham Lomi
Right: Assc. Prof. Mithulananthan



**Photo Session:
General Chair and
Keynote Speakers**



Keynote Speakers Session: Prof. Dong-Seong Kim



Keynote Speakers Session: Prof. Dr. Ir. Mauridhi Hery



Assc. Prof. Mithulananthan Madarajah



Prof. Yosuke Nakanishi, Ph.D





Participants and Presentation Session



Presenters Photo



**Question and Answer
Session Conferences**

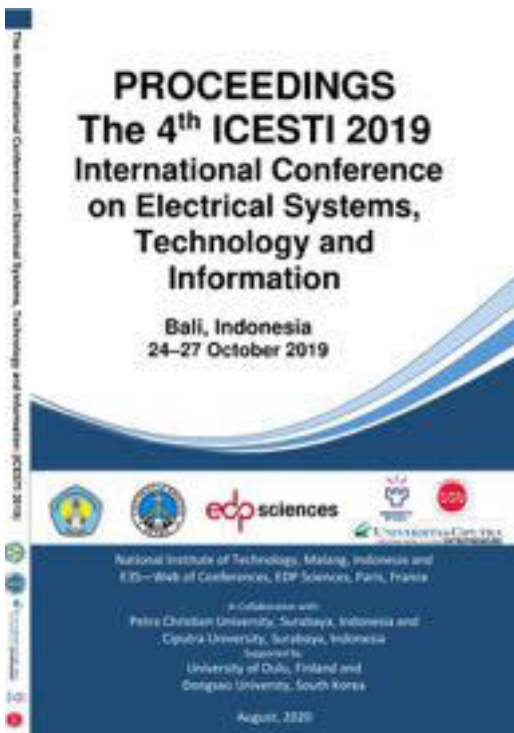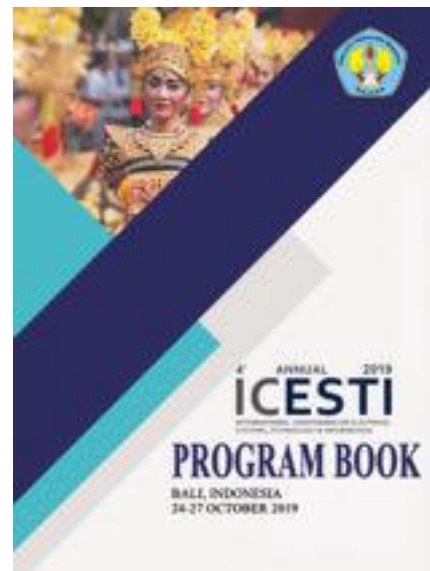

The Proceedings of the 4th Electrical Systems, Technology and Information (ICESTI 2019) consists of 27 selected articles, amount 24 of them were the results of joint research by Indonesian and overseas scholars. In the collaboration research, 32 institutions were involved 18 of which were from abroad Indonesia. The overseas institutions are from Australia, Germany, India, Japan, Estonia, Latvia, Lithuania, Malaysia, the Netherlands, Palestine, Philippines, Republic of China, Singapore, Sweden, & United Kingdom. Editing procedures were held by scholars from four countries (Estonia, Georgia, India, Indonesia)

"Rumah Paper Kita"
 (Our House of Papers)
 Editing and Proofreading Services

Please email to the Contac Person below.
 If you need a proceeding cover the 4th ICESTI 2019 above

Roy Hendroko Setyobudi
Email: roy_hendroko@hotmail.com
Phone/ WA: +62 815 9555 028

Statement of Peer review

In submitting conference proceedings to *Web of Conferences*, the editors of the proceedings certify to the Publisher that

1. They adhere to its **Policy on Publishing Integrity** in order to safeguard good scientific practice in publishing.
2. All articles have been subjected to peer review administered by the proceedings editors.
3. Reviews have been conducted by expert referees, who have been requested to provide unbiased and constructive comments aimed, whenever possible, at improving the work.
4. Proceedings editors have taken all reasonable steps to ensure the quality of the materials they publish and their decision to accept or reject a paper for publication has been based only on the merits of the work and the relevance to the journal.

Title, date and place of the conference

Title: The 4th International Conference on Electrical Systems, Technology and Information (ICESTI 2019).

Date: 24-27 October 2019

Place: Bintang Bali Resort Hotel, Kuta, Bali, Indonesia.

Website: <http://www.icesti.org/>

Proceedings editor(s):

Principal Editor: Roy Hendroko Setyobudi (Malang, IDN)

Board of Editor: Juris Burlakovs (Tartu, EST), Peeyush Soni (Kharagpur, IND),
Rangga Kala Mahaswa (Yogyakarta, IDN), and Tsitsino Turkadze (Kutaisi, GEO)

Date and editor's signature

Malang, August 31, 2020

(Roy Hendroko Setyobudi)

All issues ▶ Volume 188 (2020)

◀ Previous issue

Table of Contents

Next issue ▶

Free Access to the whole issue

E3S Web of Conferences

Volume 188 (2020)

The 4th International Conference on Electrical Systems, Technology and Information (ICESTI 2019)

Bali, Indonesia, October 24-27, 2019

R. Hendroko Setyobudi, J. Burlakovs, P. Soni, R. Kala Mahaswa and T. Turkadze (Eds.)

Export the citation of the selected articles [Export](#)

[Select all](#)

[Open Access](#)

About the conference

Published online: 08 September 2020

PDF (2.95 MB)

[Open Access](#)

Statement of Peer review

Published online: 08 September 2020

PDF (181 KB)

- [Open Access](#)

Participatory Design in the Development of Animated Comic on Website 00001
Abdi Prasetyo, Hestiasari Rante, Dwi Susanto, Aliv Faizal Muhammad and Michael Lund
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800001>
PDF (577.5 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

A Numerically Robust Sequential Linear Programming Algorithm for Reactive Power Optimization 00002
Abraham Lomi, Awan Uji Krismanto, I Made Wartana and Dipu Sarkar
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800002>
PDF (359.5 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

3D Printing Process of Making a Smartphone Holder 00003
Armita Dewi, Hestiasari Rante, Achmad Basuki, Felix Pasila and Michael Lund
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800003>
PDF (922.9 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Music Scoring for Film Using Fruity Loops Studio 00004
Arsya Febrian, Hestiasari Rante, Sritrasta Sukaridhoto and Akhmad Alimudin
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800004>
PDF (564.5 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Smart Micro-Grid Performance using Renewable Energy 00005
Bangun Novianto, Kamaruddin Abdullah, Aep Saepul Uyun, Erkata Yandri, Syukri Muhammad Nur, Herry Susanto, Zane Vincëviča-Gaile, Roy Hendroko Setyobudi and Yanuar Nurdiansyah
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800005>
PDF (674.2 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Design and Construction of Single Phase Radial Flux Permanent Magnet Generators for Pico hydro Scale Power Plants Using Propeller Turbines in Water Pipes 00006
Eko Yohanes Setyawan, Yusuf Ismail Nakhoda, Awan Uji Krismanto, Lalu Mustadi, Erkata Yandri and Juris Burlakovs
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800006>
PDF (480.7 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Conceptualizing Indonesia's ICT-based Energy Security Tracking System with Detailed Indicators from Smart City Extension 00007
Erkata Yandri, Roy Hendroko Setyobudi, Herry Susanto, Kamaruddin Abdullah, Yogo Adhi Nugroho, Satriyo Krido Wahono, Feri Wijayanto and Yanuar Nurdiansyah
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800007>
PDF (490.7 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

UI/UX Design for Metora: A Gamification of Learning Journalism Interviewing Method 00008
Friskila Enggar Pamudyaningrum, Hestiasari Rante, Muhammad Agus Zainuddin and Michael Lund
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800008>
PDF (332.1 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Towards Integration of Heterogeneous Controllers in an IOT-based Automation System 00009
Handy Wicaksono, Petrus Santoso, Iwan Handoyo Putro, Ivan Surya Hutomo and Prilicia Alvina
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800009>
PDF (685.7 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Development of the Biogas-Energized Livestock Feed Making Machine for Breeders 00010
Herry Susanto, Roy Hendroko Setyobudi, Didik Sugiyanto, Syukri Muhammad Nur, Erkata Yandri, Herianto Herianto, Yahya Jani, Satriyo Krido Wahono, Praptiningsih Gamawati Adinurani, Yanuar Nurdiansyah and Abubakar Yaro
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800010>
PDF (1.613 MB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Image Restoration using Mirroring Method Which Based on the Gradient Direction 00011
I Komang Somawirata, Aryanto Soetedjo, Sotyohadi Sotyohadi, Fitri Utaminingrum and Maizirwan Mel
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800011>
PDF (574.0 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Design of DC Wirings for Urban House in Indonesia Including Analysis on Appliances, Power Losses, and Costs: An alternative to Support Rooftop PV Uptake 00012
I Nyoman Satya Kumara, I Wayan Gede Santika, I Gede Eka Wiantara Putra, Daniel Sitompul and Cokorde Gede Indra Partha
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800012>
PDF (698.3 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Denoising of Fetal Phonocardiogram Signal by Wavelet Transformation 00013
Irmalia Suryani Faradisa, Ananda Ananda, Tri Arief Sardjono and Mauridhi Hery Purnomo
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800013>
PDF (369.9 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Understanding Engineering Students' Behaviours when Writing Group Report using Wiki 00014
Iwan Handoyo Putro, Petrus Santoso, Handry Khoswanto, Handy Wicaksono and Ivan Surya Hutomo
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800014>
PDF (218.8 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Child Location Tracker with Virtual Fence 00015
Joseph Dedy Irawan, Emmalia Adriantantri and Augustinus Bohaswara Haryasena
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800015>
PDF (507.6 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Renewable Energy Technologies for Economic Development 00016
Kamaruddin Abdullah, Aep Saepul Uyun, Rahedi Soegeng, Eri Suherman, Herry Susanto, Roy Hendroko Setyobudi, Juris Burlakovs and Zane Vincëviča-Gaile
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800016>
PDF (1.235 MB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Vertical Axis Wind Turbine Improvement using DC-DC Boost Converter 00017
Khairunnisa Khairunnisa, Syaiful Rachman, Edi Yohanes, Awan Uji Krismanto, Jazuli Fadil, Soedibyo Soedibyo, Mochamad Ashari and Mahmoud Abuzalata
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800017>
PDF (564.1 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Life Cycle Impact Assessment on Electricity Production from Biomass Power Plant System Through Life Cycle Assessment (LCA) Method using Biomass from Palm Oil Mill in Indonesia 00018
Kiman Siregar, Achmadin Luthfi Machsun, Sholihati Sholihati, Rizal Alamsyah, Ichwana Ichwana, Nobel Christian Siregar, Syafrandi Syafrandi, Intan Sofiah, Try Miharza, Syukri Muhammad Nur et al. (2 more)
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800018>
PDF (534.1 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Energy Efficiency of Eco-Friendly Home: Users' Perception 00019
Maranatha Wijayaningtyas, Sutanto Hidayat, Togi Halomoan Nainggolan, Fourry Handoko, Kuku Lukiyanto and Azizah Ismail
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800019>
PDF (355.6 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Inventory Support System for Retail Shop 00020
Rinabi Tanamal, Yanuar Nurdiansyah and Firdaus Firdaus
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800020>
PDF (344.1 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

The Development of Prediction Indicators on Open Access Market Using Neuro-Fuzzy Method 00021
Ronald Limowa Lie, Murtiyanto Santoso, Felix Pasila, Raymond Sutjiadi and Resmana Lim
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800021>
PDF (819.3 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Determination of Generator Capability Curve using Modified-Single Machine to Infinite Bus (M-SMIB) System Approach 00022
Rusliawati Rusliawati, Irine Budi Sulistiawati and Naoto Yorino
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800022>
PDF (397.5 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Juxtaposition in Montage Movie 00023
Shella Azizah, Hestiasari Rante, Dwi Susanto and Akhmad Alimudin
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800023>
PDF (663.2 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Tire Pressure and the Availability of Gasoline Monitoring Tools Based on IOT 00024
Tandya Daviend Benaya Nugroho, Albert Gunadi, Evelyn Raguindin and Hartono Pranoto
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800024>
PDF (346.5 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

How A PID Controlling A Nonlinear Plant 00025
Timbang Pangaribuan, Sahat Parullian Siahaan and Shyh Leh Chen
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800025>
PDF (732.0 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Sketch-Based Image Retrieval with Histogram of Oriented Gradients and Hierarchical Centroid Methods 00026
Viny Christanti Mawardi, Yoferen Yoferen and Stéphane Bressan
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800026>
PDF (383.1 KB) | [References](#) | [NASA ADS Abstract Service](#)
- [Open Access](#)

Spelling Correction Application with Damerau-Levenshtein Distance to Help Teachers Examine Typographical Error in Exam Test Scripts 00027
Viny Christanti Mawardi, Fendy Augustian, Jeanny Pragantha and Stéphane Bressan
Published online: 08 September 2020
DOI: <https://doi.org/10.1051/e3sconf/202018800027>
PDF (718.2 KB) | [References](#) | [NASA ADS Abstract Service](#)

Vertical Axis Wind Turbine Improvement using DC-DC Boost Converter

Khairunnisa Khairunnisa^{1,*}, *Syaiful Rachman*¹, *Edi Yohanes*¹, *Awan Uji Krismanto*², *Jazuli Fadil*³, *Soedibyo Soedibyo*³, *Mochamad Ashari*³, and *Mahmoud Abuzalata*⁴

¹Department of Electrical Engineering, Politeknik Negeri Banjarmasin, Jl. Brig Jend. H. Hasan Basri, Banjarmasin 70124, South Kalimantan, Indonesia

²Department of Electrical Engineering, Institut Teknologi Nasional, Jl. Sigura - Gura No.2 Sumpersari, Malang 65152, East Java, Indonesia

³Department of Electrical Engineering, Institut Teknologi Sepuluh Nopember, Jl. Raya ITS, Keputih Sukolilo, Surabaya, East Java, 60111 Indonesia

⁴Department of Electrical Engineering, Polytechnic Palestine University, Wad Al-Hareya, Hebron, West Bank, Palestine

Abstract. Vertical axis wind turbine (VAWT) can be operated in any direction of wind speed, but it has low rotation. To improve the performance of VAWT in which low rotation, this paper presents a simple control strategy of VAWT using a DC-DC boost converter to tap constant voltage in a standalone application. The main objective of this research is to maintain a constant output voltage of converter despite variation input voltage affected by variable wind speed. A simple proportional-integral (PI) controller has been used for a DC-DC boost converter and tested in MATLAB-Simulink environment, with the closed-loop system of the converter maintain constant output voltage although the wind speed is kept changing. The PI controller obtains the feedback from the output voltage of the boost converter to produce the correct pulse width modulation (PWM) duty cycle and trigger the metal oxide semiconductor field effect transistor (MOSFET) following the reference voltage of the turbine. This system has suppressed the value of overshoot and increased the efficiency of wind turbines as 34 %.

Keywords: Control modelling, energy conversion, pulse width modulation, transient, voltage control.

1 Introduction

Wind energy conversion is the transformation of energy from wind kinetic energy into mechanical energy using turbine rotor blades. Turbine rotor shafts are connected to generators that produce electrical energy. The main source of energy for the wind turbine is the wind speed which is key to producing the maximum power output. There are many advantages of wind turbines compared to conventional plants such as diesel generators and

*Corresponding author : khairunnisa@poliban.ac.id

other fossil fuel plants. The advantages of wind turbines are that they are environmentally friendly, inexpensive and the capability to reduce CO₂ emissions [1].

Wind speed is an important parameter in a wind energy conversion system, especially in converting mechanical power output into electrical energy. For producing optimal power, the control method needs to be carefully designed. Besides, a control method is needed so that the turbine can still operate safely in a wide range of wind speeds. So that the turbines work remains protected even when wind speed is excessive [2].

There are two types of wind turbines based on turbine rotation orientation, namely the horizontal axis wind turbine (HAWT) and vertical axis wind turbine (VAWT) [2]. Currently, both of these turbine technologies continue to be developed to achieve better efficiency in terms of blade design and electronic control to overcome dynamic wind speeds. Based on the Betz limit theory, HAWT has better efficiency than VAWT. But VAWT also has many advantages including being able to operate in all wind directions and generators can be placed closer to the ground. VAWT is very suitable for stand-alone applications in the remote area [1].

There are two types of wind turbine control systems, namely fixed speed wind turbines and variable speed wind turbines. Fixed speed wind turbines rotate at constant wind speed so fluctuating winds will cause efficiency to decrease. Variable speed wind turbines can extract maximum power over a wide range of wind speeds [2]. To control the wind turbine, the generator is connected to the power converter. One generator that is widely used for VAWT is a permanent magnet generator (PMSG) for the conversion of mechanical power into electrical power. Next, PMSG is connected to a power converter. There are several topology converters used in wind turbines, including the DC-DC boost converter, buck converter, buck-boost converter and many other variants of converters that have been developed by researchers. DC-DC converters are widely used to maintain output voltage when input voltage changes [3, 4].

Several control techniques have been proposed to improve stability with fast transient responses such as fuzzy control, PID control, Particle Swarm Optimization, Genetic Algorithm and many others that have been developed by researchers. In advanced controllers, they use maximum power point tracking to extract maximum power in wider wind speeds, like perturb and observe (PnO). This algorithm has a fast response to find the peak power point of the wind turbine [1, 5, 6].

This paper presents a dynamic model of stand-alone type vertical axis wind turbines with a small scale. VAWT rotors designed to determine the type and capacity of the generator so that the right power converter parameters can be determined based on optimum mechanical and electrical power. The power converter using a PI controller to set the duty cycle on the boost converter to enhance the constant voltage output. The PI controller is tuned using trial and error to find the appropriate values of PI gains. The results are compared with the conventional boost converter which is operated without the PI controller to see the differences in transient voltage output.

2 VAWT modelling

The vertical axis wind turbine or VAWT rotates based on the rotary axis which is perpendicular to the ground. Based on Figure 1, the generator is connected to a hub or rotor blade to convert mechanical power into electrical power. The power generated depends on the wind speed that rotates the turbine to produce kinetic energy with the following Equation (1):

$$KE = \frac{1}{2}mv^2 \quad (1)$$

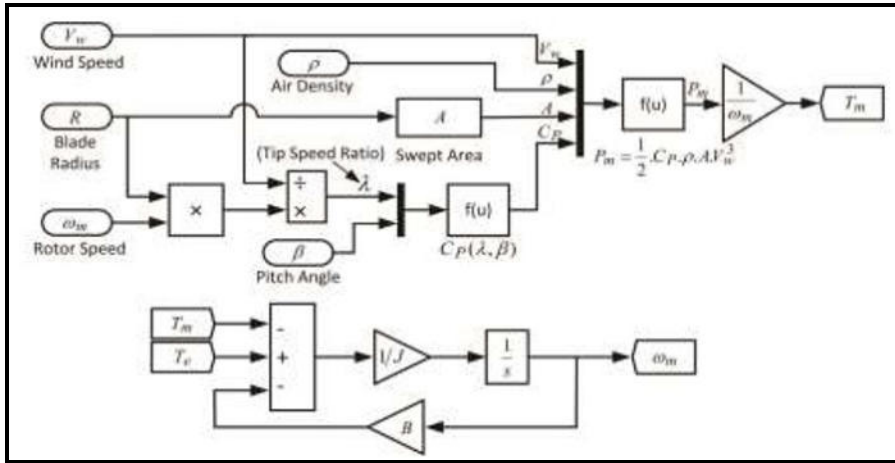


Fig. 1. Dynamic model of wind turbine [7].

The following is the Equation (2) where the power P indicates the amount of density of wind energy generated from the movement of the wind that will pass through the swept area or the width of the sweep of blade A:

$$P = \frac{\text{Energy}}{\text{Time}} = \frac{1}{2} \left(\frac{\text{Energy}}{\text{Time}} \right) v^2 \tag{2}$$

Below (Equation (3)) is the speed of the density of air that crosses a swept area A is the product of the density of air ρ and velocity (v):

$$m = \rho \cdot A \cdot v \tag{3}$$

Then the power of wind speed through a swept area can be represented as Equation (4):

$$P_{\text{available}} = \frac{1}{2} \cdot \rho \cdot A \cdot v^3 \tag{4}$$

$P_{\text{available}}$ is the power available in the wind (W) with the period of air type ρ (kg m^{-3}), v^3 is the wind speed (m s^{-1}). A is a swept area formed by sweeping the blade that crosses the air. For VAWT with the type of straight blade, the swept area is the result of multiplying the diameter of the turbine and the height of the blade in the meter precision. That is Equation (5):

$$A = h \cdot D \tag{5}$$

D is the diameter of the turbine and h is the height of the turbine blade (m).

Figure 2 shows that the VAWT with straight blade type and the wind will pass through the swept area in any direction and transform wind energy into mechanical energy. Where the swept area is the result of multiplying the diameter of the turbine and the height of the blade. The transformation of kinetic energy into mechanical energy converted using VAWT can be expressed in Equation (6) and Equation (7) as follows:

$$P_m = \frac{1}{2} \cdot \rho \cdot A \cdot v^3 \cdot C_p(\theta, \lambda) \tag{6}$$

$$T_m = \frac{P_m}{\omega_m} = \frac{\frac{1}{2} \cdot \rho \cdot A \cdot v^3 \cdot C_p(\theta, \lambda)}{\omega_m} \tag{7}$$

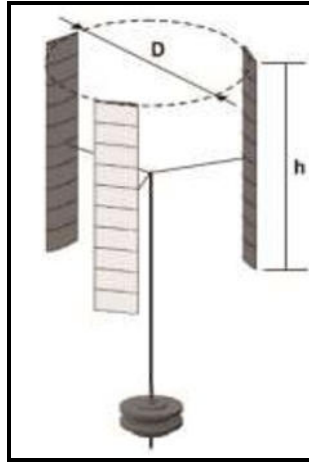


Fig. 2. Swept area of VAWT.

Where $C_p(\theta, \lambda)$ is the blade coefficient parameter and the function of the pitch angle θ is also the ratio of the tip speed of the blade λ , Equation 6 is used to calculate turbine power [7]. the tip speed ratio of the blade is the ratio between the tip speed of the blade and the wind speed [8]. T_m is the mechanical torque of the turbine in N.m and ω_m is the speed of the turbine mechanical angle in rad s^{-1} [9]. Tip speed ratio can be expressed in Equation (8) as follows:

$$\lambda = \frac{r\omega}{v_w} \tag{8}$$

Where r is the radius of the turbine, v_w is the wind speed and ω is the turbine rotational speed [10]. Mechanical angular velocity can be represented in Equation (9) as follows:

$$J \frac{d\omega_m}{dt} = T_e - T_m - B \cdot \omega_m \tag{9}$$

Where J is the combination of inertia of the wind turbine and rotor (kg m^{-2}), T_e is electromagnetic torque (N.m), and B is rotor friction (N m s rad^{-1}) [10].

Based on several equations above, it can be concluded that there are four main parameters that affect turbine mechanical power output, namely wind speed, swept area, air density and C_p [11]. For swept efficiency the area depends on the fabrication or design while the density of air is a constant value. Mechanical power output is also affected by turbine rotor speed. The maximum turbine mechanical power output at maximum wind speed is only at the optimum rotor speed [12], which is the maximum C_p value with an optimum tip speed ratio. The parameters used for vertical axis wind turbines are as follows:

Table 1. Parameter geometry of VAWT.

No	Wind Turbine	Vertical Axis
1	Blade Height (m)	1
2	Swept Area (m^2)	1
3	Number of Blade	3
4	Radius (m)	0.5
5	Chord Length (mm)	200
6	Airfoil	NACA 4412

3 PWM of DC-DC converter

This DC-DC converter control circuit is better known as pulse width modulation (PWM). Where this circuit forms a large pulse of the duty cycle system used. It is produced by generating pulses with a certain period according to the desired design in controlling the converter circuit switching process. The duty cycle (D) is defined as the ratio between the switch time on the T_s period. This comparison is usually expressed as a percentage. Mathematically the definition can be written as follows in Equation (10):

$$D = \frac{T_{on}}{T_s} 100 \% \tag{10}$$

D = Duty Cycle

T_{on} = Priode of time on

T_s = Priode of time PWM signal

DC-DC boost converter is a power supply component that is not isolated, where the output voltage is greater than the input. The DC-DC converter consists of at least a FET power switch (MOSFET Q) and a diode with inductor (L) as energy storage. Use of capacitor filters in order to eliminate ripples from the output voltage. The DC-DC boost amplifier is operated continuously or the intermittent mode depends on the inductor current. PWM control power has a "on" and "off" state. This situation is shown in Figure 3 and Figure 4 respectively. Total duration of status ON at T and the Q switch is active, and the T OFF status when switching Q is inactive in continuous conduction mode given by Equation (11) and Equation (12). Where, duty cycle (d) is a cycle governed by a control circuit, where d T is a transition period for one cycle.

$$t_{on} = t_s d \tag{11}$$

$$t_{off} = t_s (d - 1) \tag{12}$$

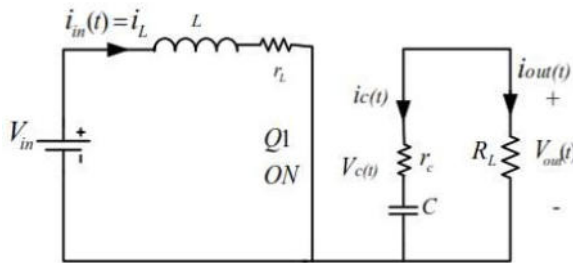


Fig. 3. Bosst converter $0 < t < T_{on}$.

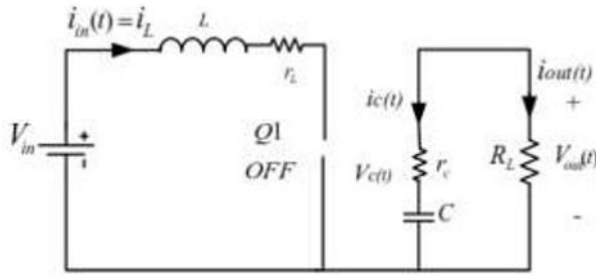


Fig. 4. Boost converter $T_{on} < t < T$.

Steady state input for voltage output conversion ratio is given by Equation (13):

$$V_{out} = \frac{V_{in}}{1-d} \tag{13}$$

The size of the inductor's peak-to-peak current ripple ΔI_L is given by Equation (14):

$$\Delta I_L = \frac{V_{in} d}{f_s L} \tag{14}$$

And also the capacitor voltage output ripple ΔV_c is given by Equation (15):

$$\Delta V_c = \Delta V_{out} = \frac{I_o d}{f_s C} \tag{15}$$

The state space of the average state is used to model the DC-DC converter by considering the parameters of the system component. transfer function of the system is used to analyze the dynamic conditions of the system. In general, the average representation of a converter is expressed as in Equation (16) and Equation (17)

$$\dot{X}(t) = \bar{A}x(t) + \bar{B}u(t) \tag{16}$$

$$y(t) = \bar{C}x(t) \tag{17}$$

Based on the boost converter (Figure 3) when the Q switch is active, and when the steady state is activated, and Kirchof Law applies the KVL and KCL converters, the cycle matrix with d as the weighting factor is obtained as the following matrix Equation (18), Equation (19) and Equation (20):

$$\bar{A} = \begin{bmatrix} (R_{on} + r_L)d + (r_L + R_L // r_c)(1-d) & \frac{R_L(1-d)}{L(R_L + r_c)} \\ \frac{R_L(1-d)}{C(R_L + r_c)} & \frac{1}{C(R_L + r_c)} \end{bmatrix} \tag{18}$$

$$\bar{B} = \begin{bmatrix} \frac{1}{L} \\ 0 \end{bmatrix} \tag{19}$$

$$\bar{C} = [R_L // r_c(1-d)] \frac{R_L}{R_L + r_c} \tag{20}$$

To analyze dynamic conditions and design of controllers for DC-DC converters, MATLAB state space is used in the form of space-state using the command transfer function to control the converter and get the Gvd converter output (s), while the converter is designed based on parameters steady state which is presented as needed.

Figure 5 shows that the DC-DC boost converter is connected to PMSG and three phases diode rectifier. The circuit consist of inductor, capacitor, diode, and mosfet as the switching component to generating pulses with PID controller. In the discussion of the controller designed for the converter DC-DC converter, analysis of the input controller forms a unit with the feedback that was first analyzed. The transient response presented in Figure 8 shows that the system has an overshoot with several oscillations, up time and completion time with a time response. To eliminate the overshoot system and improve the temporary response and also eliminate steady-state errors [13], it is necessary to design a PID controller using three different tuning methods.

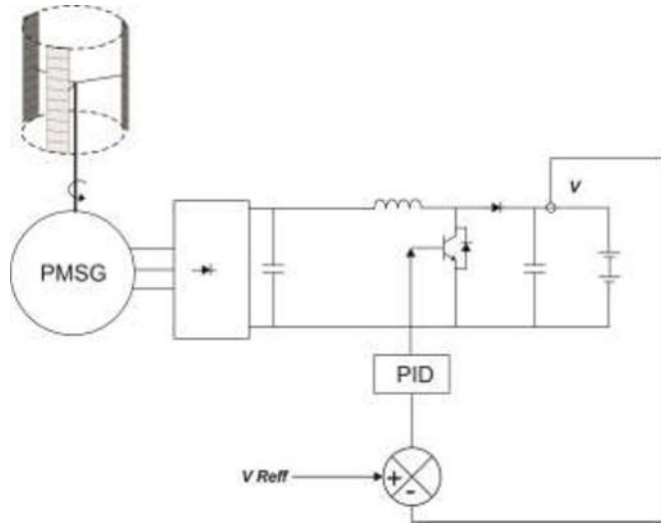


Fig. 5. VAWT With DC-DC Boostconverter

The integral and proportional derivative controller (PID) is considered to be the most studied and used controller because of its simplicity and robustness (Equation (21)).

$$u(t) = k_p e(t) + K_i \int_0^t e(t) + K_d \frac{de(t)}{dt} \tag{21}$$

The above relationship equation in the domain-transfer function of the PID controller is given by Equation (22) as follows :

$$C(s) = k_p + \frac{K_i}{s} + K_d s \tag{22}$$

Where, (K_i) and (K_d) are the integration gain and derivative gain of each constant.

4 Results and discussion

There are several parameters for determining a closed loop system, namely, rise time, overshoot, settling time, and the steady state error. Rise time is the time needed by the converter's output starting from the first time the system is run until it reaches the desired level. Overshoot is the value of the peak level measured from the steady state. Settling time is the time needed by the system to converge the steady state. Steady state error is the difference between the steady state output and the desired output. Each PID control action has certain advantages. Proportional control action has the advantage of rapid rise time,

integral control action has the advantage of minimizing errors, and derivative control actions have the advantage of minimizing errors or reducing overshoot/undershoot. Thus, in order to produce an output with a fast rise time and a small error, these three control actions can be combined into a PID control action. Figure 6 shows that the feedback obtain from output voltage of converter and compared with reference voltage to minimize error with PID controller.

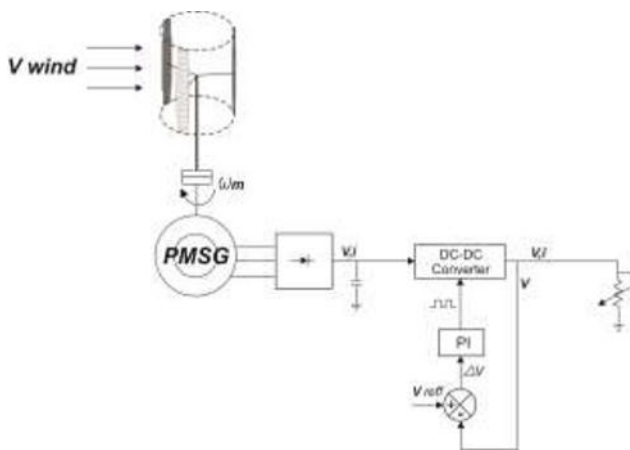


Fig. 6. PID controller concept for VAWT.

Table 2. Parameter of boost converter.

No	Parameter	Value
1	Input Voltage	12 V
2	Output Voltage	24 V
3	BoostInductor	92 μ H
4	FilterCapacitor	378 μ F
5	ResistiveLoad	25 Ω
6	Duty Cycle	0.5
7	K_p	0.001
8	K_i	0.01

The modeling results from VAWT are shown in the Figure 7. Where the optimum power that can be achieved is 480 W at a constant wind speed of 12 m s^{-1} with a turbine rotational speed at 280 rpm ($1 \text{ rpm} = 1/60 \text{ Hz}$).

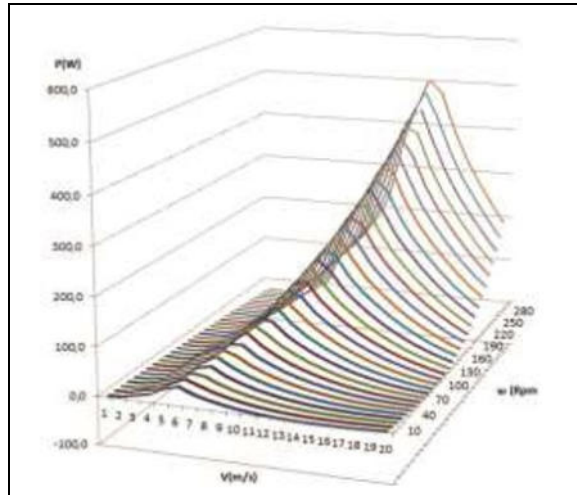


Fig. 7. The power curve of VAWT.

At a constant wind speed of 12 m s^{-1} by ignoring the mechanical losses the PMSG output voltage is 12 Vac and becomes an input rectifier with an output voltage of 12 Vdc and becomes used as a boost converter input. The simulation done under closed loop conditions with a PI controller that reduced steady state error close to zero and improves the dynamic response of the converter as shown in Figure 9, the output voltage is close to the target voltage and reduce over shoot from 54.16 % to 12.5 % with settling time 0.086 s. The load is a constant resistance of 25Ω .

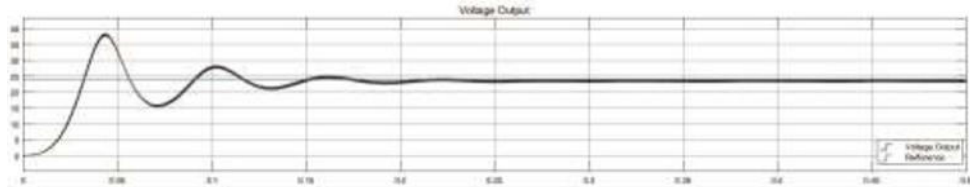


Fig. 8. Simulation result of conventional boost converter.

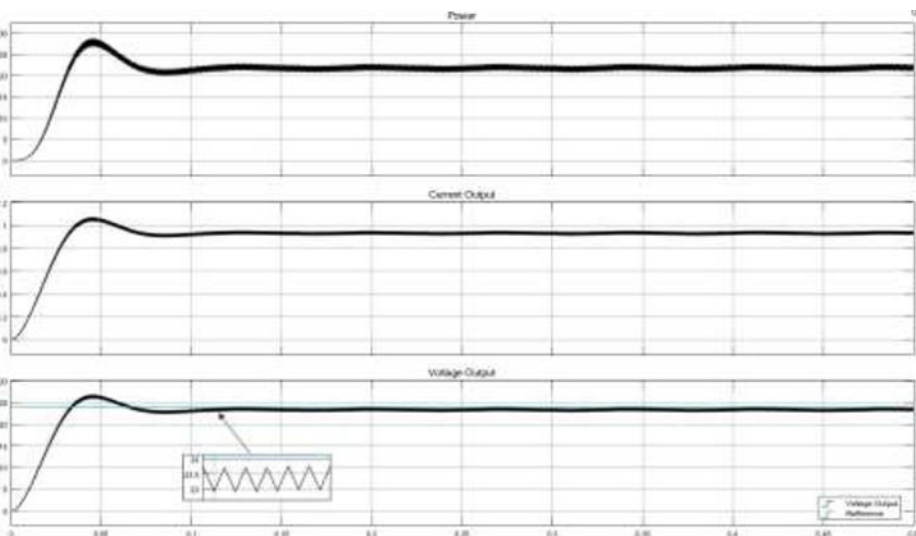


Fig. 9. Simulation result of boost converter with pi controller.

Figure 9 shown that the reference voltage is 24 V with peak overshoot of output voltage is 12.5 % with peak time is 0.04 s and rise time is 0.034 s. The ripple output voltage is 0.78 V with switching frequency is 1.6 kHz. The system results show that the boost converter with a PI controller provides better output voltage regulation and over shoot reduction with settling time is 0.086 s.

5 Conclusion

Based on simulation result, the proposed method is better than the conventional boost converter. In which DC-DC Boost converter with the PI controller provides better voltage regulation and has a higher efficiency of 34 %, it can be observed that the voltage output remains constant in 24 V and over shoot reduction as well. The ripple voltage is 0.78 V with settling time is 0.086 s

The author would like to thank the Politeknik Negeri Banjarmasin, Institut Teknologi Sepuluh November and the Ministry of Research, Technology and Higher Education Republic of Indonesia for funding support (contract number: 014/SP2H/PPM/DRPM/2019) and to all those who have helped this research.

References

1. A. Merabet, J. Kerr, V. Rajasekaran, D. Wight. *Power electronics circuit for speed control of experimental wind turbine*. Paper Presented in 24th International Conference on Microelectronics (Algiers, Algeria, 2012).
<https://ieeexplore.ieee.org/document/6471368>
2. B. Wu, Y. Lang, N. Zargari, S. Kouro. *Power conversion and control of wind energy systems*. New York: IEEE Press (2011). p. 480.
<https://ieeexplore.ieee.org/book/6047595>
3. M.F. Adnan, M.A.M. Oninda, M.M. Nishat, N. Islam. *IJERT* **6**,9:27–32(2017).
<https://www.ijert.org/design-and-simulation-of-a-dc-dc-boost-converter-with-pid-controller-for-enhanced-performance>
4. V. Lazarov, D. Roy, D. Spirov, Z. Zarkov. *New control strategy for variable speed wind turbine with dc-dc converters*. Paper Presented in 14th International Power Electronics and Motion Control Conference, EPE-PEMC. (Ohrid, Republic of Macedonia, 2010).
<https://ieeexplore.ieee.org/document/5606570>
5. F.-Q. Chen, J.-M. Yang. *Fuzzy PID controller used in yaw system of wind turbine*. Paper Presented in International Conference on Power Electronics Systems and Applications (Hong Kong, China, 2009). <https://ieeexplore.ieee.org/document/5228644>
6. B. Hu, L. Chang, Y. Xue. *Control and design of a novel buck-boost converter for wind turbine applications*. Paper Presented in International Conference on Sustainable Energy Technologies (Singapore, Singapore, 2008).
<https://ieeexplore.ieee.org/document/4747008>
7. D. Kumar, K. Chatterjee. *Renewable and Sustainable Energy Review* **55**:957–970(2016). <https://www.sciencedirect.com/science/article/abs/pii/S1364032115012654>
8. J. Jhon. *Mechanics of extendable wind turbine blades*. [Thesis]. Department of Civil and Environmental Engineering, Colorado State University, USA (2015). p. 89.
https://mountainscholar.org/bitstream/handle/10217/166942/John_colostate_0053N_12905.pdf;sequence=1

9. G.M.H. Shahariar, M.R. Hasan. *Design and construction of a vertical axis wind turbine*. Paper Presented in 9th International Forum on Strategic Technology (IFOST). (Chittagong, Bangladesh, 2014). IEEE, 326–329(2014).
<https://ieeexplore.ieee.org/document/6991132>
10. P.D.A. Aziz, A.K.R. Mohamad, F.Z. Hamidon, N. Mohamad, N. Salleh, N.M. Yunus. A simulation study on airfoils using VAWT design for low wind speed application. Paper Presented in 4th International Conference on Engineering Technology and Technopreneuship (ICE2T) (Kuala Lumpur, Malaysia, 2014). IEEE, 105–109(2014).
<https://ieeexplore.ieee.org/document/7006228>
11. J. Fadil, Soedibyoy, M. Ashari. Performance comparison of vertical axis and horizontal axis wind turbines to get optimum power output. The 15th International Conference on Quality in Research (QIR): International Symposium on Electrical and Computer Engineering (Bali, Indonesia, 2017). IEEE, 429–433(2017).
<https://ieeexplore.ieee.org/document/8168524>
12. J. Fadil, Soedibyoy, M. Ashari. Performance analysis of vertical axis wind turbine with variable swept area. Paper Presented in International Seminar on Intelligent Technology and Its Application 2017 (ISITIA) (Surabaya, Indonesia, 2017). IEEE, pp 231–235(2017). <https://ieeexplore.ieee.org/document/8124083>
13. N. Tiwari, A.N. Tiwari. Performance analysis of unidirectional and bidirectional buck-boost converter using PID controller. Paper Presented in 2nd International Conference on Electronics, Materials Engineering & Nano-Technology (IEMENTech) (Kolkata, India, 2018). <https://ieeexplore.ieee.org/document/8465229>