

Application of Amine Modified Silica Adsorbents on CO₂ Adsorption in Biogas

by Nanik Astuti Rahman

Submission date: 28-Jun-2022 11:33AM (UTC+0700)

Submission ID: 1864012815

File name: eai.2-10-2018.2295556.pdf (491.87K)

Word count: 2551

Character count: 13255

Application of Amine Modified Silica Adsorbents on CO₂ Adsorption in Biogas

1st Nanik Astuti Rahman¹, 2nd Widiyastuti², 3rd Masrurotul Ajiza¹, 4th Dimas Indra Laksana¹
{nanik_ar29@yahoo.com¹}

National Institute of Technology Malang, East Java, Indonesia¹, Sepuluh Nopember Institute of Technology Surabaya, East Java, Indonesia²

Abstract. The adsorption process is a technology that is more efficient in CO₂ adsorption. The adsorbent used must have adsorption capacity and high selectivity to CO₂ adsorption. In this study, silica is used because it has sufficient surface area and pore size. In addition, the presence of silanol group on the surface of silica allows silica to be modified with other functional groups for certain applications. One of the interesting points is the modification of silanol groups with amine group, where the amine group is selective towards CO₂. The success of the adsorbent depends on the successful modification of the amine group to the surface of the silica through the reaction of the hydroxyl group on the surface of the substrate and silane compounds. Amine compounds used as modifying agents are APTS (aminopropyltriethoxysilane). The method used to modify silica gel is post grafting. Biogas to be purified is made by mixing vegetable waste with cow dung as a starter source of methanogen. The methane gas content can be increased by reducing the amount of CO₂ gas in biogas. Methane gas content in biogas made from vegetable waste is 78.5% while CO₂ gas is 16%. The process of CO₂ gas adsorption is done by passing the biogas on the silica adsorbent which has been modified with amine. This process lasts for 30 minutes. The results of the analysis with TGDTA and FTIR showed that the adsorption has been proceeded. CO₂ gas which is successfully adsorbed from biogas is 80% and this increase the level of CO₂ gas which rises from 16% to 12.76%

Keywords: silica-amine; adsorption CO₂; biogas

1 Introduction

During the current global energy crisis, renewable energy sources such as biogas have enormous potential in meeting energy needs in the future. Biogas is a very important renewable source of methane produced through anaerobic biomass biodegradation. The biogas content in general is 50-70% CH₄, 30-45% CO₂ and the rest is water and hydrogen sulfide (H₂S) [1]. Very large carbon dioxide content can reduce the heating value of the biogas and affect the performance of the engine. In addition H₂S gas is very corrosive and harmful to the environment. Energy conversion from biogas to heat or electricity is possible through combustion. Biogas can be transferred through piping or by compression in a tube. This is possible only if the content of CO₂, H₂S and moisture is removed. Reduction of CO₂ and H₂S content will significantly increase the quality of biogas.


Various techniques have been developed for acid gas separation, including chemical absorption, physical absorption, physical adsorption and membrane separation. Among these techniques, chemical absorption using alkanolamines as monoethanolamine and diethanolamine is the most popular in large-scale industries such as the sweetening of natural gas and the separation of CO₂ from the exhaust gas of power plants. Although the absorption method is a relatively low-cost process, the regeneration of these absorbents requires large costs and energy. In addition this technique provides many problems including high corrosion rates, degradation of absorbents and foam formation in the gas-liquid interface.

The application of this technology is not widely used in small-scale processes such as biogas purification. This is because the use of liquid for the separation of CO₂ gas has many obstacles including the need for large energy for the regeneration process, the stability and selectivity of the chemicals used, the environmental impacts caused by liquid waste, the need for large-sized equipment and the high rate of corrosion of the equipment.

To overcome this problem, an alternative is used through physical adsorption with solid adsorbent. One of them is using nanoporous and mesoporous silica gel which is grafted with amine groups. The development of silica that has been grafted with amine groups has been developed as an adsorbent due to its efficiency and selectivity to CO₂. Mesoporous silica is known to have a high amount of silanol groups which can be grafted with organic amine compounds. Therefore, Mesoporous silica is a potential substrate for amines that can be used for the purpose of CO₂ adsorption [2-4].

Based on the studies that have been carried out so far, the raw material used as a source of silica is usually in the form of tetraethyl orthosilicate (TEOS) or tetramethyl orthosilicate (TMOS) because of its large silica content. However, TEOS and TMOS are expensive, difficult to obtain and toxic raw materials. Therefore, it is necessary to develop silica which is cheap and non-toxic as ash bagasse.

Bagasse ash which has a high silica content (above 50%) is a very potential raw material due to its low price, abundant amount and amorphous silicic properties which can be easily modified with a relatively cheaper and low energy sol-gel process to obtain desired particle structure. Affandi et al 2009 [5] succeeded in synthesizing high purity mesopore silica (above 99%) from bagasse ash by caustic digestion method. This method does not require large energy and uses environmentally friendly raw materials.

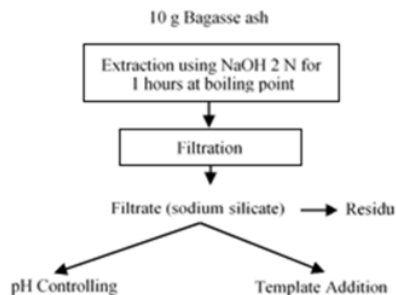

From the description above, in this study the problem is focused on making bagasse ash-based silica gel adsorbents that will be grafted with amine as an adsorbent for carbon dioxide (CO₂). The source of silica used is bagasse ash and the amine source used is 3-Aminopropyltriethoxysilan (APTS). The purpose of this study are: Develop a method of grafting amine groups on the surface of bagasse ash-based silica gel to capture of carbon

dioxide (CO₂) gas in biogas. So, the purposes of this study was to test the performance of silica amine as adsorbent of carbon dioxide gas in biogas.

2 Experiment

To obtain mesoporous silica particles which are capable of being grafted with amine groups in large quantities so that they have high acid gas adsorption capacity, it is obtained by regulating the process conditions. To achieve this goal required mesoporous-sized pore silica structure. Particles with this structure, pores with a certain volume and diameter are obtained by controlling pH on gel formation and can also be done by adding a template for more directed pore formation [6][7], and adding organic acids to control gel formation [8].

2.1 Extraction of silica from bagasse ash.

The extraction process of silica from ash bagasse adopts from a procedure that has been developed by Affandi [5]. The details are carried out in the following way : 10 grams of bagasse ash (PT. Kebon Agung Sugar Factory, Malang) was extracted using 60 ml NaOH 2N (Sigma Aldrich) to produce sodium silicate. Silica from bagasse ash was extracted for 1 hour with constant stirring at its boiling point. The solution is then filtered using ash filter Whatman No. 41 to separate the carbon residue. Filtrates (sodium silicate) are then cooled to room temperature.

2.2 Synthesis of silica-amine hybrid

Synthesis silica-amine hybrid with controlled pores using PEG (Polyethylene glycol) adopts procedures that have been developed previously [6]. The complete process is carried out in the following way as shown in Figure. 1. From Figure 1, it can be seen that the amine silica synthesis process from bagasse ash uses the post grafting method. To form pores and network amplifiers, PEG 1000 is used.


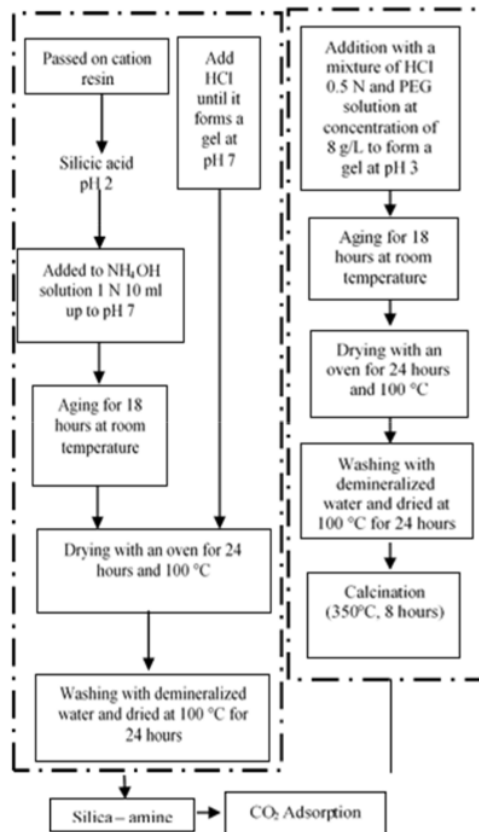


Figure 1. Flow chart of silica-amine synthesis process

3 Result and Discussion

Silica-amine synthesis that has been produced with the process conditions as in Fig. 1, obtained surface area and pores that fall into the mesopore category. The formation of the characteristics of silica-amine used as an adsorbent of carbon dioxide gas has met the requirements as an adsorbent. Pore size greatly affects the success of the adsorption process,

where the appropriate pore size can avoid obstruction of the carbon dioxide gas diffusion process into silica-amine adsorbents. As reported by Rahman [8], where the template used as a pore forming is PEG and the method used to remove templates is the calcination process carried out at 350 ° C for 8 hours. Based on the results of BET (Brunauer-Emmet-Teller) analysis, silica-amines were obtained with a pore volume size of 1.25 cc / g, pore diameter of 7.75 nm and a surface area of 650.2 m² / g.

This silica-amine is used to adsorb carbon dioxide gas in biogas. In this study, biogas was obtained from the biogas production process using vegetable waste with cow dung as a starter. Analysis of the biogas produced showed that the content of CH₄, H₂S and CO₂ were 78.5% respectively; 0.2% and 16%, and the rest is a mixture of N₂, H₂ and O₂ gases of 5.3%. Heating value is 11980 kcal / kg. When it will be applied as fuel in the combustion chamber, the presence of large amounts of CO₂ will have a negative impact because it will cause crust and long-term use can cause damage to the combustion chamber. For this reason, it is necessary to reduce CO₂ gas in biogas. In addition, as it is known that the presence of carbon dioxide gas in the atmosphere which is increasing in number each year will have an impact on global warming.

Adsorption of CO₂ gas with silica-amine was chosen as a method to reduce CO₂ levels because this process does not require energy and can be carried out under fairly safe operating conditions. In addition, the desorption process as an adsorbent regeneration is also easier to do. APTS compounds as amine sources provide high reactivity to CO₂ gas so that the CO₂ gas adsorption process can take place quickly.

The advantages of amine compounds as adsorbents of CO₂ gas when compared to other adsorbents such as zeolite or activated carbon are their tolerance to moisture. The results of the study stated that the absorption of CO₂ in the amine solution formed the following reaction:

The reaction between CO₂ and amine compounds in water- free environmental conditions will produce carbamate compounds where this reaction requires 2 amine molecules to bind one molecule of CO₂. Whereas in a humid environment, CO₂ is adsorbed with bicarbonate formation. Adsorption capacity in a humid environment is doubled compared to dry environments because it requires one amine molecule to bind one molecule of CO₂. [9]

Adsorption is carried out at 40 °C and atmospheric pressure. Biogas is passed through the silica-amine adsorbent in the adsorber column. The adsorbent that has absorbed carbon dioxide gas was analyzed by TGDTA (Thermo Gravimetric and Differential Thermal Analysis), as seen in Fig. 2.

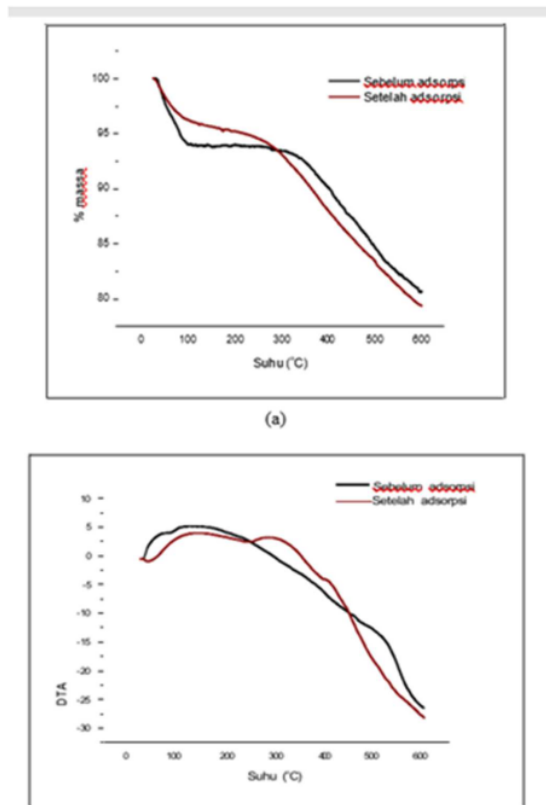


Figure 2. TGDTA Analysis (a) thermal gravimetry analysis and (b) differential thermal analysis

Thermal gravimetry-differential thermal analysis analysis is used to estimate the amount of CO₂ adsorbed by silica particles (Fig. 2). The results of the analysis can be divided into 2 regions with a temperature limit of 280 °C which is where there is an energy release which is indicated by an increase in the DTA curve (Fig. 2b) which indicates the occurrence of a chemical reaction.

At temperatures less than 280 °C the evaporated component is the solvent used, in this case water is at 100 °C and physically adsorbed CO₂ gas and other volatile components. Whereas at temperatures above 280 °C there is a release of carbamate bonds which are chemically bound CO₂ with amines which are grafted on the surface of silica. The amount of

chemically bound CO₂ is estimated to be 0.07 g / g silica or 1.61 mmol / g silica.

The amount of amine successfully grafted onto the silica surface is 2.37 mmol / g silica, in this number silica-amine is able to adsorb carbon dioxide gas as much as 1,185 mmol CO₂ / g silica. The amount of CO₂ absorbed also provides CO₂ concentration information that has been successfully removed from biogas. Analysis with GC-MS showed that there was a decrease in CO₂ levels in biogas. In the initial conditions, before the adsorption process occurred, CO₂ levels in biogas were 16%. After the adsorption process, the CO₂ content in the biogas becomes 12.76%. GC-MS analysis shows the amount of methane gas in biogas after the adsorption process is 98%. This also means that methane gas was successfully purified 80% of the initial methane rate (78.5%).

4 Conclusions

Biogas as a renewable alternative fuel has been widely applied, both as fuel for household needs such as stoves, lighting, currently biogas is also applied to meet energy needs in energy installations in industry. To meet the needs as fuel, the presence of carbon dioxide gas in biogas must be minimized. Carbon dioxide gas which is included in the category of acid gas will cause problems if the acid gas is in sufficient quantities. Carbon dioxide gas is also known as the biggest contributor to the cause of global warming. Adsorption by adsorbent silica-amine provides a solution for handling carbon dioxide gas. In addition to the easy process, the energy consumption needed to reduce the amount of carbon dioxide gas by the adsorption process is much cheaper because it is operated at room temperature and atmospheric pressure.

Silica-based carbon dioxide gas adsorbent from bagasse ash, provides an alternative choice of adsorbent that is cheap, easy to produce and most importantly environmentally friendly and can solve the problem of solid waste generated from the sugar production process.

From the results of the analysis, both with TGDTA and GC- MC, it can be concluded that biogas produced from vegetable waste can be used to meet energy needs, both for combustion chambers in motorized vehicles and energy installations in industries and households. CO₂ levels were reduced by 80%, and methane gas content was increased from 78.5% to 98%.

Acknowledgement. This paper in conjunction with the 9th International Conference On Green Technology (ICGT) 2018

References

- [1] Tippayawong, N. Thanompongchart, P. "Biogas Quality Upgrade By Simultaneous Removal Of CO₂ And H₂S in A Packed Column Reactor". in *Energy* 2010,35, 4531.
- [2] Yan, X. Zhang, L. Zhang, Y. Qiao, K. "Amine-Modified Mesocellular Silica Foams For CO₂ Capture". In *Chemical Engineering Journal*. 2011, 168, 918.
- [3] Yang, H. Xu, Z. Fan, M. "Progress In Carbon Dioxide Separation And Capture: A Review". *Journal of Environmental Sciences*. 2008, 20, 14.

- [4] Chang, F. Chao, K. Cheng, H. "Adsorption Of CO₂ Onto Amine-Grafted Mesoporous Silicas". *In Separation and Purification Technology*. 2009. 70, 87
- [5] Affandi, S. Setyawan, H. Winardi, S. Purwanto, A. Balgis, R. "A Facile Method For Production Of High-Purity Silica Xerogels From Bagasse Ash". *In Advanced Powder Technology*. 2009, 20, 468.
- [6] Rahman, NA, Widhiana, I, Juliastuti, SR, Setyawan, H, " Synthesis of mesoporous silica with controlled pore structure from bagasse ash as a silica source", *in Colloids Surf., A*, 476(2015), 1-7
- [7] Rahman, NA, Widiyastuti, W, Sigit, D, Ajiza, M, Sujana, W, "The Effect of Various Acids to the Gelation Process to The Silica Gel Characteristic Using Organic Silica." *In IOP Conf. Series : Materials Science and Engineering*, vol. 299, February 2018 (012049).
- [8] Rahman, NA, Setyawati, H, Anggorowati, DA, Astuti, S, Ajiza, M, " Pengaruh Suhu Kalsinasi pada Penghilangan Template Terhadap Karakterisasi Silika", *in Proc. Conf. on SNAST (Yogyakarta, Indonesia), Periode IV*, November 2016, p. 219 – 222.
- [9] Guerrero, R.S. Da'na, E. Sayari, A. " New Insight in the interaction of CO₂ with Amine-Functionalized Silica" *in Ind. Eng. Chem. Res.* 2008, 47, 9406

Application of Amine Modified Silica Adsorbents on CO₂ Adsorption in Biogas

ORIGINALITY REPORT

10%

SIMILARITY INDEX

5%

INTERNET SOURCES

7%

PUBLICATIONS

1%

STUDENT PAPERS

PRIMARY SOURCES

1	coek.info Internet Source	1%
2	Tippayawong, N.. "Biogas quality upgrade by simultaneous removal of CO ₂ and H ₂ S in a packed column reactor", Energy, 201012 Publication	1%
3	Prinya Chindaprasirt, Ubolluk Rattanasak. "Eco-production of silica from sugarcane bagasse ash for use as a photochromic pigment filler", Scientific Reports, 2020 Publication	1%
4	repository.uin-malang.ac.id Internet Source	1%
5	eprints.itn.ac.id Internet Source	1%
6	Haji Aripin, Seitaro Mitsudo, I. Nyoman Sudiana, Shinji Tani et al. "Rapid Sintering of Silica Xerogel Ceramic Derived from Sago Waste Ash Using Sub-millimeter Wave	1%

Heating with a 300 GHz CW Gyrotron", Journal of Infrared, Millimeter, and Terahertz Waves, 2011

Publication

7

repository.iainkudus.ac.id

Internet Source

1 %

8

Submitted to Institut Teknologi Nasional Malang

Student Paper

1 %

9

Guangming Huang, Jin Ouyang, Joris R. Delanghe, Willy R. G. Baeyens, Zhongxin Dai. "Chemiluminescent Image Detection of Haptoglobin Phenotyping after Polyacrylamide Gel Electrophoresis", Analytical Chemistry, 2004

Publication

<1 %

10

Elvia Ines, Alberto Nakauma-Gonzalez, Paola Zarate-Segur. "Chapter 6 Biogas Production and Cleanup by Biofiltration for a Potential Use as an Alternative Energy Source", IntechOpen, 2012

Publication

<1 %

11

Hong Nie, Hao Jiang, Daowen Chong, Quanguai Wu, Chunming Xu, Hongjun Zhou. "Comparison of Water Scrubbing and Propylene Carbonate Absorption for Biogas Upgrading Process", Energy & Fuels, 2013

Publication

<1 %

12

Nurina Adriana Abdul Razak, Nur Hidayati Othman, Muhammad Shafiq Mat Shayuti, Aidah Jumahat, Napisah Sapiai, Woei Jye Lau. "Agricultural and industrial waste-derived mesoporous silica nanoparticles: A review on chemical synthesis route", Journal of Environmental Chemical Engineering, 2022

Publication

<1 %

13

Santos, Thiago C. dos, and Celia M. Ronconi. "CO2 Capture in Hybrid Materials", Revista Virtual de Química, 2014.

Publication

<1 %

14

Sim, Kyohyun, Nakwon Lee, Joonseok Kim, Eun-Bum Cho, Chamila Gunathilake, and Mietek Jaroniec. "CO2 Adsorption on Amine-Functionalized Periodic Mesoporous Benzenesilicas", ACS Applied Materials & Interfaces

Publication

<1 %

15

Slamet Wahyudi. "The The Effects of Adsorbent Mass Using Red Brick Powder on The Results of Biogas Purification", Journal of Applied Engineering Science, 2020

Publication

<1 %

16

[dokumen.pub](#)

Internet Source

<1 %

17

[dspace.lib.ntua.gr](#)

Internet Source

<1 %

18 elkimkor.com Internet Source <1 %

19 mts.intechopen.com Internet Source <1 %

20 pubs.acs.org Internet Source <1 %

21 Alex C. C. Chang, Steven S. C. Chuang, McMahan Gray, Yee Soong. " In-Situ Infrared Study of CO Adsorption on SBA-15 Grafted with γ -(Aminopropyl)triethoxysilane ", Energy & Fuels, 2003
Publication

Exclude quotes On

Exclude matches Off

Exclude bibliography On